

### Features

- Low Noise Figure
- High  $IP_3$
- Single +3 V to +5 V Supply Voltage
- Lead-Free SOT-89 Package
- 100% Matte Tin Plating over Copper
- Halogen-Free “Green” Mold Compound
- RoHS\* Compliant and 260°C Re-flow Compatible

### Description

M/A-COM's MAALSS0034 broadband gain stage is a GaAs MMIC amplifier in a lead-free SOT-89 surface mount plastic package. It can be operated from a single 3 to 5 volt supply.

The MAALSS0034 employs a monolithic single-stage self-biased design featuring a convenient 50-ohm input impedance that minimizes the number of external components required. The broadband design provides low noise figure and high  $IP_3$  from 70 to 3000 MHz.


M/A-COM fabricates the MAALSS0034 using an E/D MESFET process to realize low noise and high dynamic range. The process features full passivation for performance and reliability.

### Ordering Information<sup>1,2</sup>

Part Number	Package
MAALSS0034	Bulk Packaging
MAALSS0034TR-3000	3000 piece reel
MAALSS0034SMB	Sample Test Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

### Functional Block Diagram

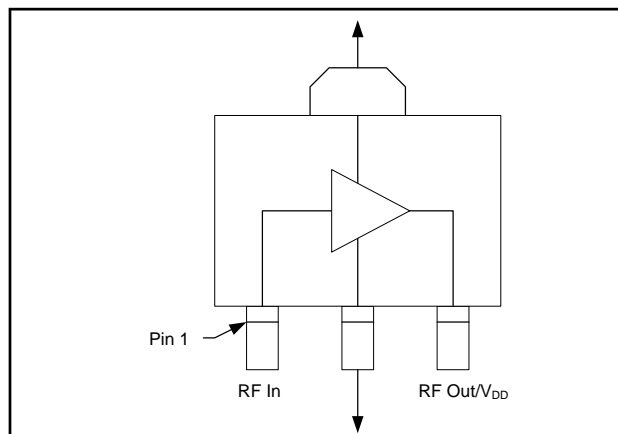

### Pin Configuration

Pin	Pin Name	Description
1	RF In	RF Input
2	GND	Ground
3	RF Out/ $V_{DD}$	RF Output & Voltage Bias

### Maximum Operating Conditions<sup>3</sup>

Parameter	Maximum Operating Condition
RF Output Power	23 dBm
Junction Temperature <sup>4</sup>	150°C
Operating Temperature	-40°C to +85°C

3. Operating at or within these conditions will ensure MTTF >  $1 \times 10^6$  hours.
4. Typical thermal resistance ( $\theta_{jc}$ ) = 100°C/W.

### Absolute Maximum Ratings<sup>5,6</sup>

Parameter	Absolute Maximum
RF Output Power	24 dBm
Voltage	6.0 volts
Storage Temperature	-65°C to +150°C
Junction Temperature	200°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. M/A-COM does not recommend sustained operation near these survivability limits.

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.


## Miniature Broadband Gain Stage 70 - 3000 MHz

Rev. V2

**Electrical Specifications:  $Z_0 = 50 \Omega$ ,  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = +5\text{ V}$  (unless otherwise specified)**

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	0.9 GHz	dB	—	14.5	—
	1.9 GHz	dB	11.0	12.0	13.0
	1.9 GHz ( $V_{DD} = +3\text{V}$ )	dB	10.5	11.5	13.0
	3.0 GHz	dB	—	9.20	—
Noise Figure	0.9 GHz	dB	—	1.55	—
	1.9 GHz	dB	—	1.60	2.0
	1.9 GHz ( $V_{DD} = +3\text{V}$ )	dB	—	1.50	2.0
	3.0 GHz	dB	—	1.70	—
Input Return Loss	0.9 GHz	dB	—	10	—
	1.9 GHz	dB	—	15	—
	3.0 GHz	dB	—	18	—
Output Return Loss	0.9 GHz	dB	—	9	—
	1.9 GHz	dB	—	14	—
	3.0 GHz	dB	—	18	—
Output P1dB	0.9 GHz	dBm	—	22	—
	1.9 GHz	dBm	—	23	—
	3.0 GHz	dBm	—	23	—
Output IP <sub>3</sub>	Two tone, -12 dBm/tone, 1 MHz spacing				
	0.9 GHz	dBm	—	33	—
	1.9 GHz	dBm	—	36	—
	3.0 GHz	dBm	—	37	—
Current	$V_{DD} = +5\text{ V}$	mA	50	88	110
	$V_{DD} = +3\text{ V}$	mA	35	70	100

### Application Schematic

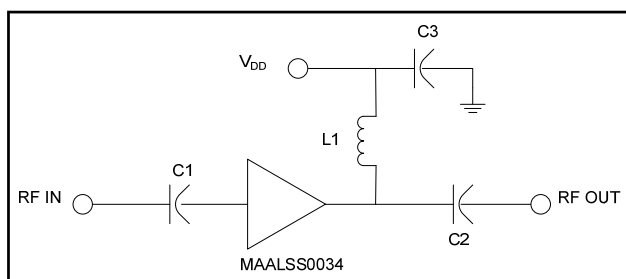


### Component List <sup>7</sup>, 500 - 3000 MHz

Part	Value	Case Style	Manufacturer	Purpose
C1,C2	39 pF	0402	Murata	DC Block
C3	0.1 $\mu\text{F}$	0402	Murata	RF Bypass
L1	12 nH	0402	Coilcraft	RF Choke/Tuning

7. Please contact M/A-COM application group for lower frequency application circuitry.

### Recommended PCB Configuration

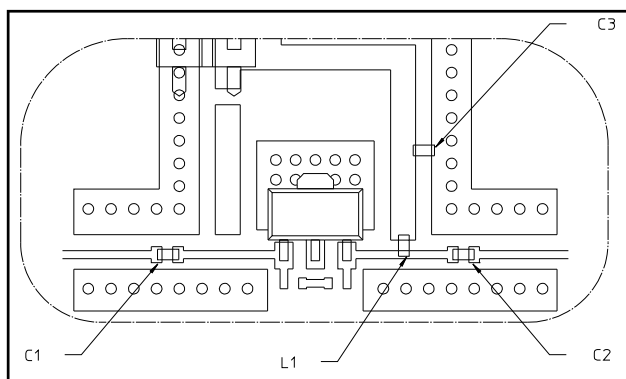

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.


**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.  
**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298  
 Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## Typical Performance Curves, $V_{DD} = +5\text{ V}$


**Gain**

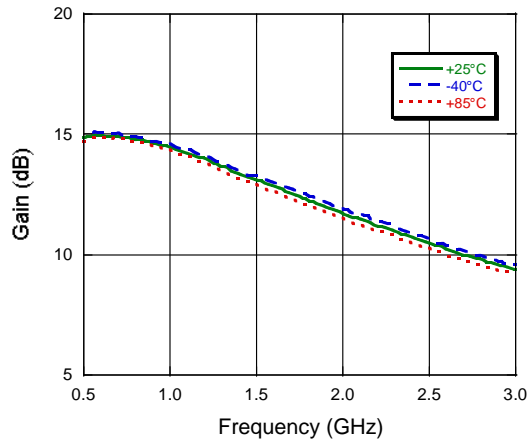


**Noise Figure**

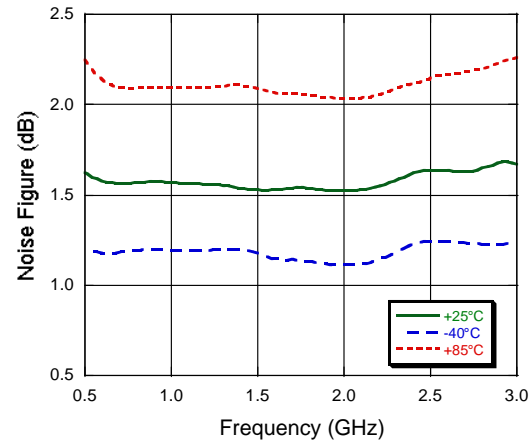


**Input Return Loss**

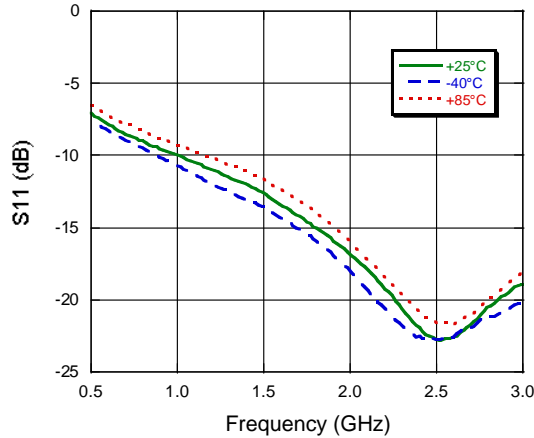


**Output Return Loss**

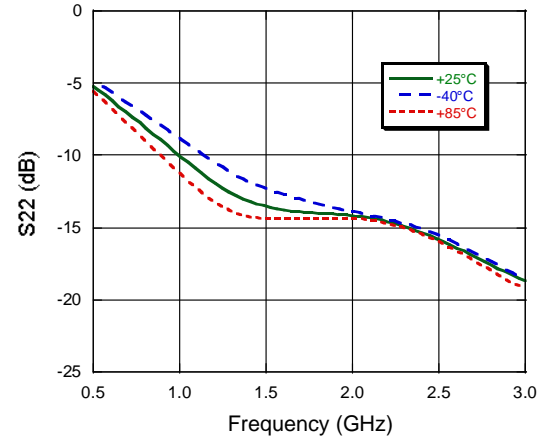

**Output P1dB**

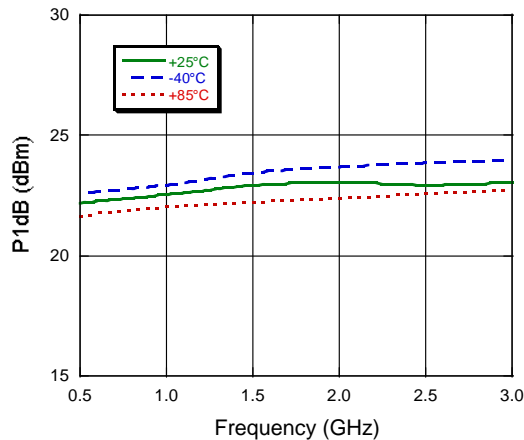


**Output IP3, Input Power = -12 dBm**

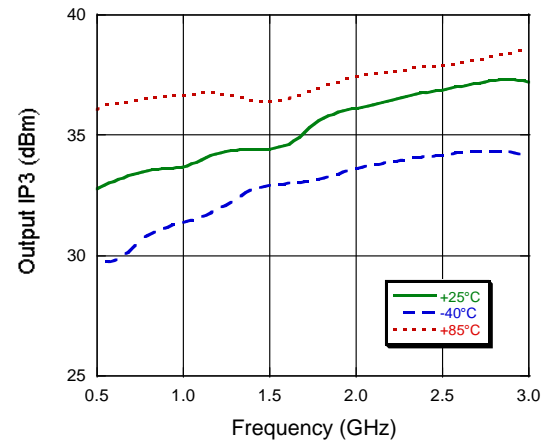


## Typical Performance Curves, $V_{DD} = +3\text{ V}$


**Gain**

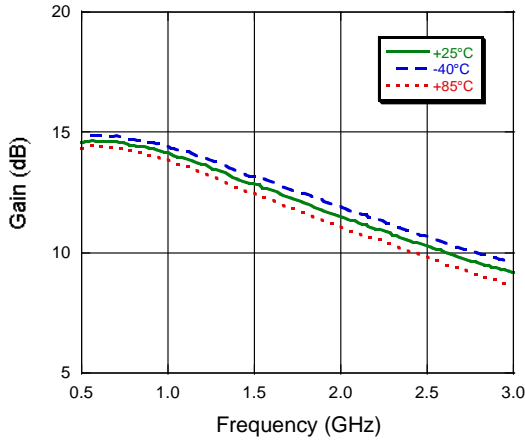


**Noise Figure**

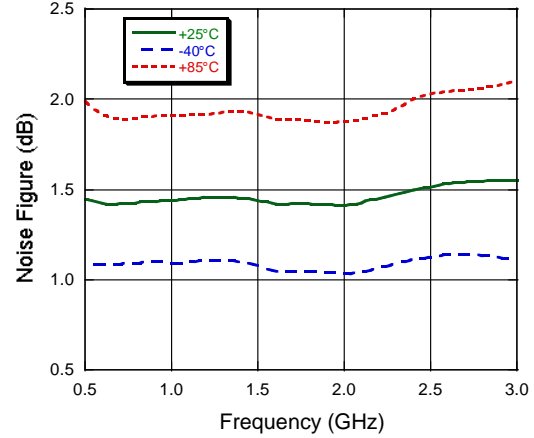


**Input Return Loss**

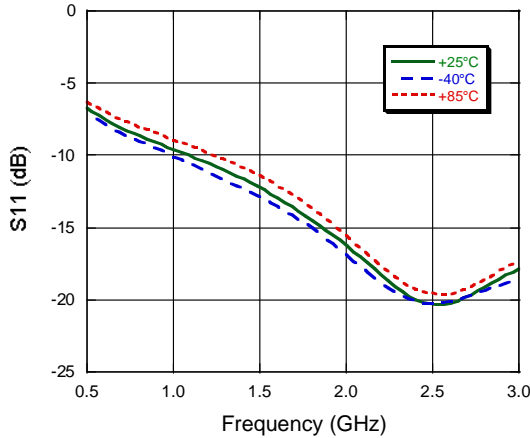


**Output Return Loss**

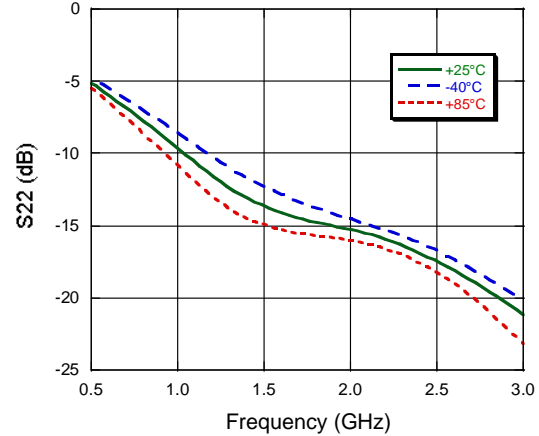


**Output P1dB**

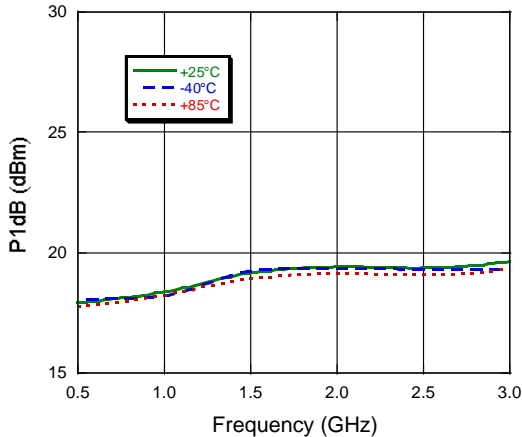

**Output IP3, Input Power = -12 dBm**

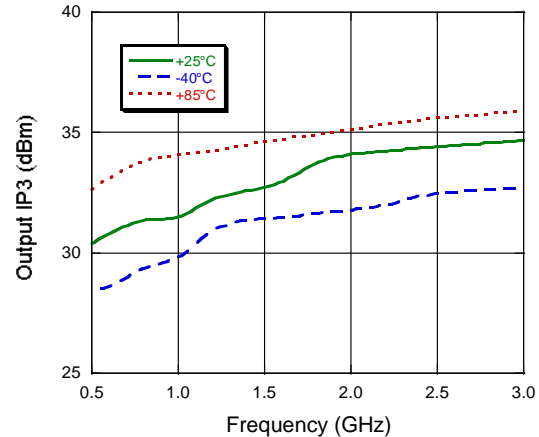

## Lead-Free SOT-89†

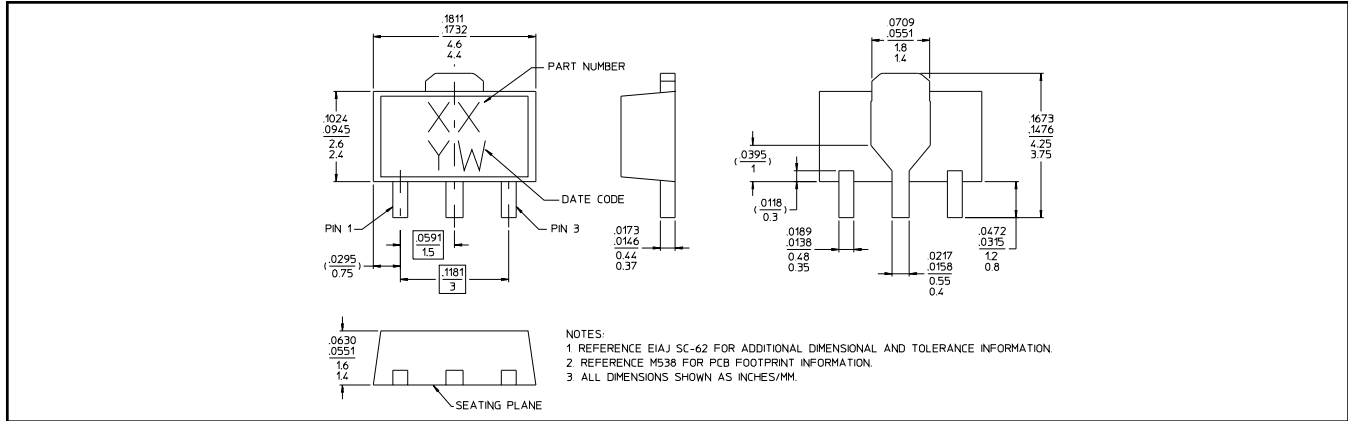

† Reference Application Note M538 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.