

DATASHEET



ELECTRICAL SPECIFICATIONS:


Frequency range	10 MHz - 50 GHz
Impedance	50 Ω
VSWR	1.35 (max.)
Insertion loss	0.60 dB (max.)
Avg. Input power	2 W max. @ 25 °C
Voltage rating	60 V
Operating temp. range	-55 / +100 °C
Connector type	2.4mm male – 2.4mm female

MATERIAL SPECIFICATIONS:

	Materials	Finishes
Body	Stainless steel	Passivated
Center contact	BeCu	Gold plating



Unit: mm

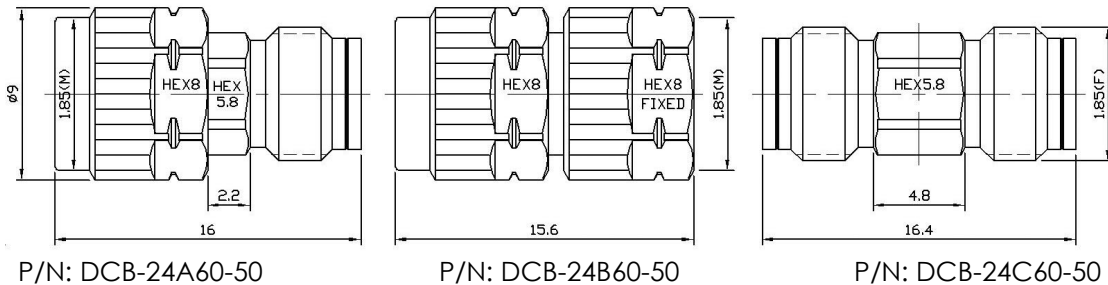

Typical performance graph

