
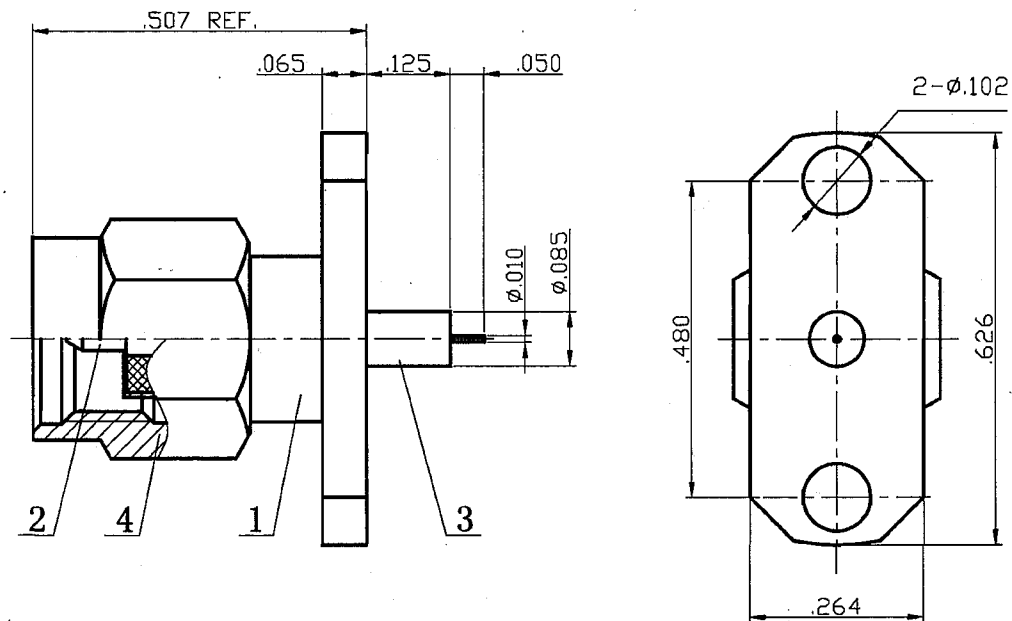


- 1.0 PERFORMANCE
 1.1 VOLTAGE RANGE: 335V RMS (sea level)
 1.2 DWV: 1000V RMS
 1.3 TEMPERATURE RANGE: -65° C TO +165° C
 1.4 INSULATION RESISTANCE: 5000M OHMS
 2.0 MATERIALS
 2.1 DIELECTRIC: PTFE

- 2.2 CENTER CONTACT: BeCu
 2.3 BODY: STAINLESS STEEL
 3.0 FINISHES
 3.1 CENTER CONTACT: GOLD PLATED 30 MICROINCHES THICKNESS
 3.2 ALL OTHER METAL PARTS: PLATED PER TABLE



						THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION. PROPRIETARY TO SDT INC. IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED IN WRITING BY SDT INCORPORATED.			Shanghai SDT Inc. No.4Lane 1175Tongpu Rd.,Shanghai,China,200333 Fax:021-52701318; Tel:52701316; Email:sdpshc@sh163.net			
						UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCH ALL DIMENSIONS ARE AFTER PLATING. .XXX=±.005 ALL MACHINED SURFACES $\sqrt{R_3}$ MAX. .XX=±.01 ANG.± 1/2° FRACTIONAL=± 1/64			TITLE SMA STRAIGHT PANEL PLUG			
									MATERIAL:		FINISH:	
						THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING		DWG NO. 21234-2	REV. 2
4	NUT	STAINLESS STEEL	PASSIVATE	1		DWN	YHJ	19/03/04				
3	DIELECTRIC	PTFE		1		CHKD	SJG	19/03/04				
2	CENTER CONTACT	BeCu	GOLD	1		APPR	SJG	19/03/04				
1	BODY	STAINLESS STEEL	PASSIVATE	1								
NO.	PART	MATERIAL	FINISHES	QUANTITY								