

DATASHEET



ELECTRICAL SPECIFICATIONS:




Frequency range	dc - 2 GHz
Impedance	50 Ω
Voltage rating	750V/50Hz max.
Insulation resistance	5000 MΩ min.
Temperature range	-65 / +85 °C
Life time	500 mating

MATERIAL SPECIFICATIONS:

	Materials	Finishes
Connector body	Brass	Nickel plating
Center contact	Brass	Gold plating
Ferrule	Brass	Nickel plating
Insulator	PTFE	-

CABLE GROUP:

RG174 / RG188 / RG188A / RG316

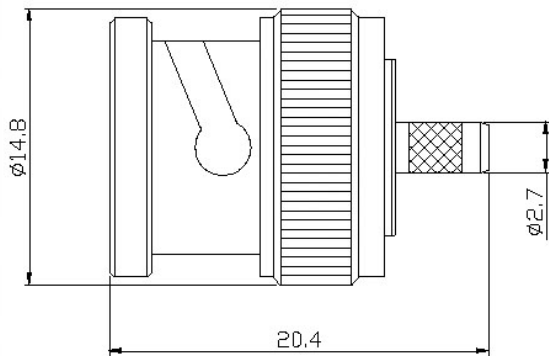

CABLE STRIPPING

