


MI DRG. NO. 8766H REV. H

8766

TUNING TOOL

NOTES: FILE: AIROUT

1. HANDLE TO BE FREE OF ALL GATE BURRS & FLASH.
2. ALL HEX CORNERS .005 RADIUS.
3. SURFACE OF IMBEDDED PORTION OF BIT OPTIONAL FOR GOOD MOLDING PRACTICES & MAXIMUM STRENGTH.
4. .005 MAX. FLASH ALLOWED BEYOND .050 ± .010 DIMENSION.
5. MATERIAL: HANDLE: ZYTEL 70G33HS1L NC010 BIT: STEEL, GOLD PLATED
6. COLOR: LIGHT BLUE.

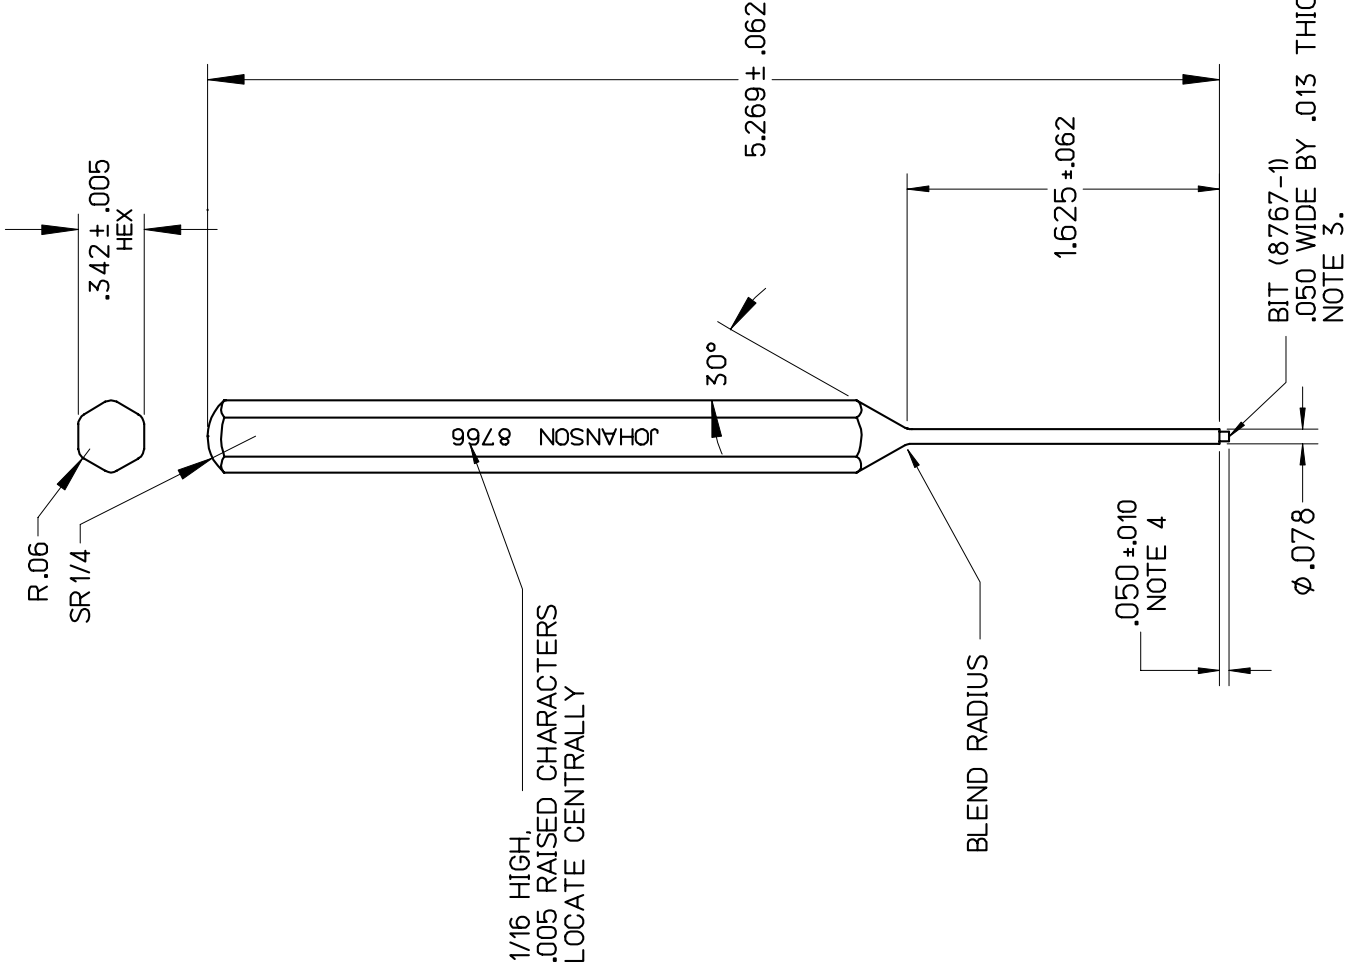

H	02/27/01	MLD	TAM	JHT	010-028
G	02/20/01	TAM	-	-	010-021
LEVEL	DATE	DRN.	CHK.	APP.	ECN

REVISIONS

DRN.	CHK.	TAM	APP.	WEH	SCALE
TAM	TAM	TAM	APP.	WEH	1" = 1"
DATE	DATE	DATE	DATE	DATE	.XX ± .015
02/20/01	02/23/01	02/23/01	02/23/01	02/23/01	.XXX ± .005

JOHANSON MANUFACTURING CORPORATION
 ROCKAWAY VALLEY ROAD, BOONTON, N.J. 07005 (973)334-2676 FAX (973)334-2954
 ELECTRONIC ACCURACY THROUGH MECHANICAL PRECISION



PROPRIETARY INFORMATION CONTAINED NOT TO BE USED WITHOUT JOHANSON MANUFACTURING CORPORATION APPROVAL