
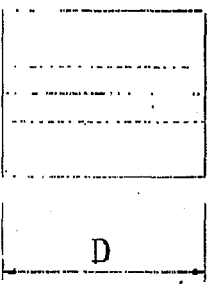


SPECIFICATION FOR APPROVAL

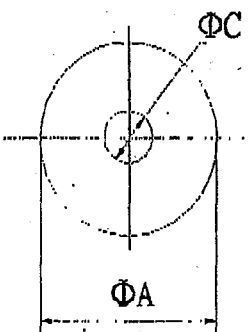

CUSTOMER: ITEM: K5A RH 18.2X9.7X28.2	CUS' S P/N: DATE: 2006/6/12 REF NO:10-13-182097282-0																																													
(1) DIMENSION (Unit: mm) <div style="display: flex; justify-content: space-around; align-items: center;">   </div>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 5%;">A</td> <td style="width: 15%;">18.20</td> <td style="width: 10%;">+ -</td> <td style="width: 10%;">0.50</td> <td style="width: 10%;">mm</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>mm</td> </tr> <tr> <td>C</td> <td>9.70</td> <td>+ -</td> <td>0.30</td> <td>mm</td> </tr> <tr> <td>D</td> <td>28.20</td> <td>+ -</td> <td>0.60</td> <td>mm</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>mm</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>mm</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>mm</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>mm</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td>mm</td> </tr> </table>	A	18.20	+ -	0.50	mm					mm	C	9.70	+ -	0.30	mm	D	28.20	+ -	0.60	mm					mm					mm					mm					mm					mm
A	18.20	+ -	0.50	mm																																										
				mm																																										
C	9.70	+ -	0.30	mm																																										
D	28.20	+ -	0.60	mm																																										
				mm																																										
				mm																																										
				mm																																										
				mm																																										
				mm																																										
(2) ELECTRICAL REQUIREMENTS:																																														

			TEST FREQ
Z	85 - 0 Ω		25 MHz
Z	140 - 0 Ω		100 MHz
COIL DATA	Qo= PF		TEST FREQ

REMARK:

Winding 0.65 Φ X 100 mm 2U.E.W 1 TS

- (3) TEST INSTRUMENTS**
 1. RF LCR METER: HP4286A

DRAWN		CHECKED		APPROVED	ISSUE NO.
DATE		DATE	DATE		FU-RH-117

佳真股份有限公司

INSPECTION DATA

ISSUE NO: FU-RH-117

CUSTOMER				DATE	2006/6/12	Quantity	0	pcs
PART NO.	10-13-182097282-0							
ITEM	K5A RH 18.2X9.7X28.2							
COIL SPEC	0.65 Φ X 100 mm 2 U.E.W 1 TS							
COIL DATA	QO=	CO=	(PF)					
TEST FREQ	FO=	Hz	Ft= 25,100 MHz					
TEMPERATURE	28 °C	Humidity	90 %					

ELECTRIC CHAREC.

DIMENSION(Unit:mm)

	ELECTRIC CHAREC.			DIMENSION(Unit:mm)									
	L	Q	Z(25)	Z(100)	A	B	C	D	E	F	G	H	I
SP			85.00	140.0	18.20		9.70	28.20					
+					0.50		0.30	0.60					
-			0	0	0.50		0.30	0.60					
1			109.0	180.0	18.16		9.64	28.33					
2			108.0	179.0	18.13		9.80	28.31					
3			108.0	179.0	18.16		9.76	28.35					
4			108.0	180.0	18.07		9.82	28.30					
5			108.0	181.0	18.04		9.73	28.37					
6			109.0	180.0	18.11		9.65	28.34					
7			108.0	180.0	18.11		9.64	28.27					
8			107.0	179.0	18.17		9.63	28.30					
9			107.0	178.0	18.05		9.76	28.28					
10			108.0	178.0	18.08		9.66	28.31					
X			108.0	179.4	18.11		9.71	28.32					
R			2.00	3.00	0.13		0.19	0.10					

TEST INSTRUMENTS

1. RF LCR METER: HP4286A

INSP No:

REMARK:


Inspected 	Checked 	Approved
---------------	-------------	--------------

Z-F RESPONSE

K5A RH 18.2X9.7X28.2

1. TEST INSTRUMENT: HP4286A

2. WINDING: 0.65ΦX100 mm 2 U.E.W 1TS

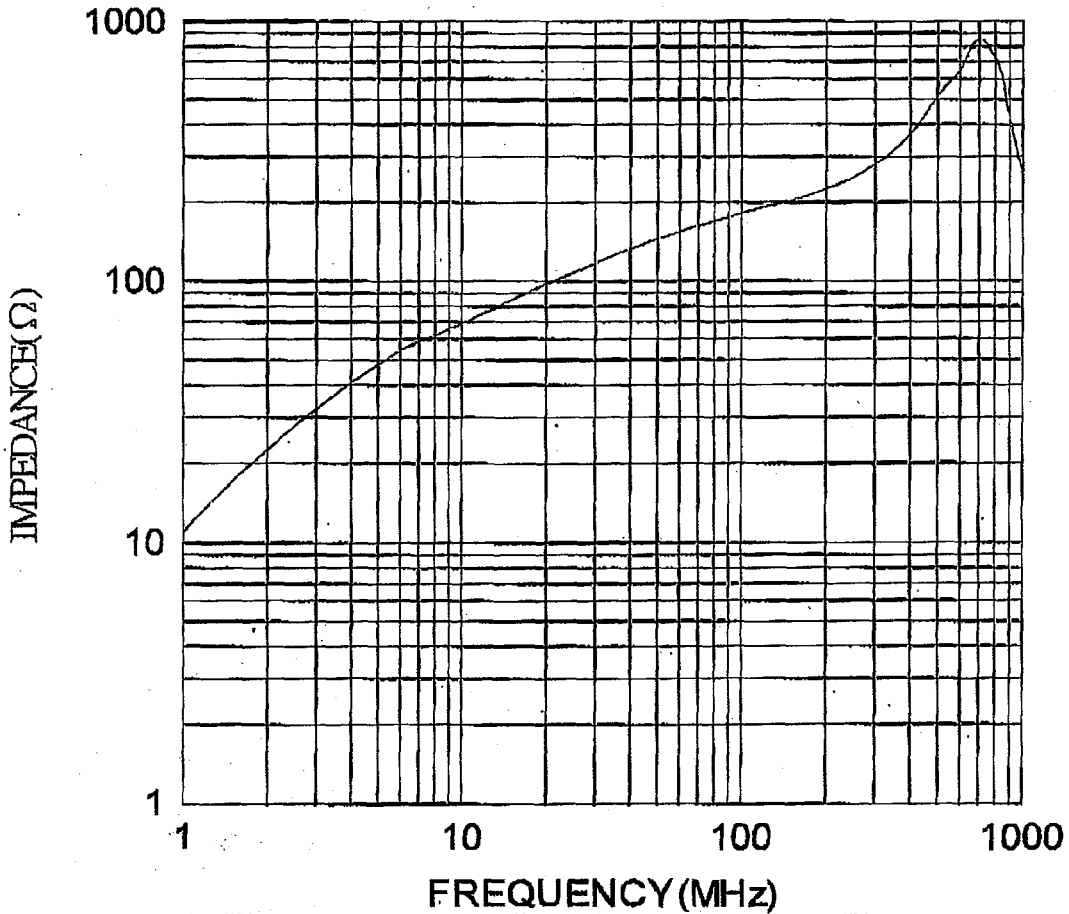

	1	5	10	25	50	100	200	300	400	500	600	700	800	900	1000
Z—	11	48	69	108	145	182	226	281	368	517	650	849	727	424	258

(DATA BETWEEN 500MHz AND 1000MHz ARE FOR REFERENCE ONLY)