

High Voltage Ceramic Capacitors (DC250V-6.3kV)





DEH Series (125 deg. C Guaranteed/Low-dissipation Factor/DC250V-3.15kV)

■ Features

1. Reduced heat dissipation permitted due to small dielectric loss of the ceramic material.
2. Operating temperature range is guaranteed up to 125 degree C.
3. Coated with flame-retardant epoxy resin (equivalent to UL94V-0 standards).
4. We eliminated lead (Pb) from plating lead wires.
5. Taping available for automatic insertion.

■ Applications

Ideal for use on high frequency pulse circuits such as a horizontal resonance circuit for CTV and snubber circuits for switching power supplies.

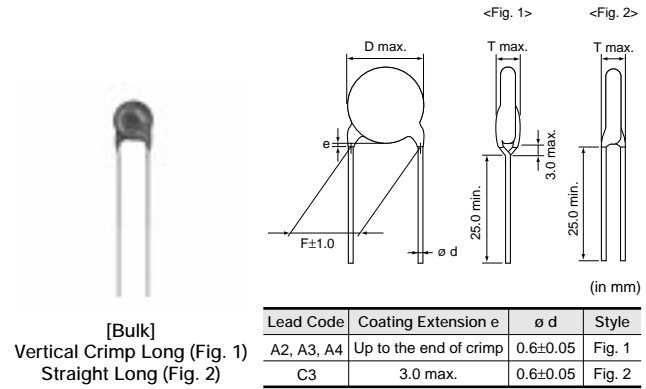

■ Marking

Rated Voltage		DC250V	DC500V	DC1-3.15kV
Temp. Char.		R	C	R
Nominal body diameter				
ø6mm		HR 102 66	HR 471 66	—
ø7-9mm		HR R 332K 250V 66	HR C 152K 66	HR R 102K 1KV 66
ø10-21mm		HR R 103K 250V M66	HR C 472K M66	HR R 272K 3KV M66
High Temperature Guaranteed Code		HR		
Temperature Characteristics		Marked with code (omitted for nominal body diameter ø6mm)		
Nominal Capacitance		Marked with 3 figures		
Capacitance Tolerance		Marked with code (omitted for nominal body diameter ø6mm)		
Rated Voltage	DC250V	Marked with code (Marked with horizontal line over nominal capacitance for nominal body diameter ø6mm)		
	DC500V	Omitted		
	DC1-3.15kV	Marked with code (In case of DC3.15kV, marked with 3KV)		
Manufacturer's Identification		Marked with M (omitted for nominal body diameter ø9mm and under)		
Manufactured Date Code		Abbreviation		

DC250V, R Characteristics

Part Number	DC Rated Voltage (Vdc)	Capacitance (pF)	Body Dia. D (mm)	Lead Spacing F (mm)	Body Thickness T (mm)	Lead Package Long Bulk	Lead Package Short Bulk	Lead Package Taping
DEHR32E221K□□□□	250	220 +10,-10%	6	5.0	4.0	A2B	B2B	N2A
DEHR32E331K□□□□	250	330 +10,-10%	6	5.0	4.0	A2B	B2B	N2A
DEHR32E471K□□□□	250	470 +10,-10%	6	5.0	4.0	A2B	B2B	N2A
DEHR32E681K□□□□	250	680 +10,-10%	6	5.0	4.0	A2B	B2B	N2A
DEHR32E102K□□□□	250	1000 +10,-10%	6	5.0	4.0	A2B	B2B	N2A
DEHR32E152K□□□□	250	1500 +10,-10%	7	5.0	4.0	A2B	B2B	N2A
DEHR32E222K□□□□	250	2200 +10,-10%	8	5.0	4.0	A2B	B2B	N2A
DEHR32E332K□□□□	250	3300 +10,-10%	9	5.0	4.0	A2B	B2B	N2A
DEHR32E472K□□□□	250	4700 +10,-10%	10	5.0	4.0	A2B	B2B	N2A
DEHR32E682K□□□□	250	6800 +10,-10%	12	5.0	4.0	A2B	B2B	N2A
DEHR32E103K□□□□	250	10000 +10,-10%	12	5.0	4.0	A2B	B2B	N2A

Three blank columns are filled with the lead and packaging codes. Please refer to the 3 columns on the right for the appropriate code.

DC500V, C Characteristics

Part Number	DC Rated Voltage (Vdc)	Capacitance (pF)	Body Dia. D (mm)	Lead Spacing F (mm)	Body Thickness T (mm)	Lead Package Long Bulk	Lead Package Short Bulk	Lead Package Taping
DEHC32H331K□□□□	500	330 +10,-10%	6	5.0	4.0	A2B	B2B	N2A
DEHC32H471K□□□□	500	470 +10,-10%	6	5.0	4.0	A2B	B2B	N2A
DEHC32H681K□□□□	500	680 +10,-10%	7	5.0	4.0	A2B	B2B	N2A
DEHC32H102K□□□□	500	1000 +10,-10%	8	5.0	4.0	A2B	B2B	N2A
DEHC32H152K□□□□	500	1500 +10,-10%	9	5.0	4.0	A2B	B2B	N2A
DEHC32H222K□□□□	500	2200 +10,-10%	10	5.0	4.0	A2B	B2B	N2A
DEHC32H332K□□□□	500	3300 +10,-10%	12	5.0	4.0	A2B	B2B	N2A
DEHC32H472K□□□□	500	4700 +10,-10%	14	10.0	4.0	A4B	B4B	-

Three blank columns are filled with the lead and packaging codes. Please refer to the 3 columns on the right for the appropriate code.

DC1-3.15kV, R Characteristics

Part Number	DC Rated Voltage (Vdc)	Capacitance (pF)	Body Dia. D (mm)	Lead Spacing F (mm)	Body Thickness T (mm)	Lead Package Long Bulk	Lead Package Short Bulk	Lead Package Taping
DEHR33A221K□□□□	1000	220 +10,-10%	7	5.0	4.5	A2B	B2B	N2A
DEHR33A331K□□□□	1000	330 +10,-10%	7	5.0	4.5	A2B	B2B	N2A
DEHR33A471K□□□□	1000	470 +10,-10%	7	5.0	4.5	A2B	B2B	N2A
DEHR33A681K□□□□	1000	680 +10,-10%	8	5.0	4.5	A2B	B2B	N2A
DEHR33A102K□□□□	1000	1000 +10,-10%	9	5.0	4.5	A2B	B2B	N2A
DEHR33A152K□□□□	1000	1500 +10,-10%	11	5.0	4.5	A2B	B2B	N2A
DEHR33A222K□□□□	1000	2200 +10,-10%	13	7.5	4.5	A3B	B3B	N3A
DEHR33A332K□□□□	1000	3300 +10,-10%	15	7.5	4.5	A3B	B3B	N7A
DEHR33A472K□□□□	1000	4700 +10,-10%	17	7.5	4.5	A3B	B3B	N7A
DEHR33D221K□□□□	2000	220 +10,-10%	7	7.5	5.0	C3B	D3B	P3A
DEHR33D271K□□□□	2000	270 +10,-10%	7	7.5	5.0	C3B	D3B	P3A
DEHR33D331K□□□□	2000	330 +10,-10%	8	7.5	5.0	A3B	B3B	N3A
DEHR33D391K□□□□	2000	390 +10,-10%	8	7.5	5.0	A3B	B3B	N3A
DEHR33D471K□□□□	2000	470 +10,-10%	9	7.5	5.0	A3B	B3B	N3A
DEHR33D561K□□□□	2000	560 +10,-10%	9	7.5	5.0	A3B	B3B	N3A
DEHR33D681K□□□□	2000	680 +10,-10%	10	7.5	5.0	A3B	B3B	N3A
DEHR33D821K□□□□	2000	820 +10,-10%	11	7.5	5.0	A3B	B3B	N3A
DEHR33D102K□□□□	2000	1000 +10,-10%	12	7.5	5.0	A3B	B3B	N3A
DEHR33D122K□□□□	2000	1200 +10,-10%	12	7.5	5.0	A3B	B3B	N3A
DEHR33D152K□□□□	2000	1500 +10,-10%	12	7.5	5.0	A3B	B3B	N3A
DEHR33D182K□□□□	2000	1800 +10,-10%	14	7.5	5.0	A3B	B3B	N7A

Continued on the following page. ↗

⚠Note Please read rating and ⚠CAUTION (for storage, operating, rating, soldering, mounting and handling) in this PDF catalog to prevent smoking and/or burning, etc.
This catalog has only typical specifications. Therefore, you are requested to approve our product specifications or to transact the approval sheet for product specifications before ordering.

Continued from the preceding page.



Part Number	DC Rated Voltage (Vdc)	Capacitance (pF)	Body Dia. D (mm)	Lead Spacing F (mm)	Body Thickness T (mm)	Lead Package Long Bulk	Lead Package Short Bulk	Lead Package Taping
DEHR33D222K□□□	2000	2200 +10,-10%	15	7.5	5.0	A3B	B3B	N7A
DEHR33D272K□□□	2000	2700 +10,-10%	17	7.5	5.0	A3B	B3B	N7A
DEHR33D332K□□□	2000	3300 +10,-10%	19	10.0	5.0	A4B	B4B	-
DEHR33D392K□□□	2000	3900 +10,-10%	20	10.0	5.0	A4B	B4B	-
DEHR33D472K□□□	2000	4700 +10,-10%	21	10.0	5.0	A4B	B4B	-
DEHR33F151K□□□	3150	150 +10,-10%	7	7.5	6.0	C3B	D3B	P3A
DEHR33F181K□□□	3150	180 +10,-10%	7	7.5	6.0	C3B	D3B	P3A
DEHR33F221K□□□	3150	220 +10,-10%	7	7.5	6.0	C3B	D3B	P3A
DEHR33F271K□□□	3150	270 +10,-10%	7	7.5	6.0	C3B	D3B	P3A
DEHR33F331K□□□	3150	330 +10,-10%	8	7.5	6.0	A3B	B3B	N3A
DEHR33F391K□□□	3150	390 +10,-10%	9	7.5	6.0	A3B	B3B	N3A
DEHR33F471K□□□	3150	470 +10,-10%	10	7.5	6.0	A3B	B3B	N3A
DEHR33F561K□□□	3150	560 +10,-10%	10	7.5	6.0	A3B	B3B	N3A
DEHR33F681K□□□	3150	680 +10,-10%	11	7.5	6.0	A3B	B3B	N3A
DEHR33F821K□□□	3150	820 +10,-10%	12	7.5	6.0	A3B	B3B	N3A
DEHR33F102K□□□	3150	1000 +10,-10%	13	7.5	6.0	A3B	B3B	N3A
DEHR33F122K□□□	3150	1200 +10,-10%	14	7.5	6.0	A3B	B3B	N7A
DEHR33F152K□□□	3150	1500 +10,-10%	15	7.5	6.0	A3B	B3B	N7A
DEHR33F182K□□□	3150	1800 +10,-10%	16	7.5	6.0	A3B	B3B	N7A
DEHR33F222K□□□	3150	2200 +10,-10%	17	7.5	6.0	A3B	B3B	N7A
DEHR33F272K□□□	3150	2700 +10,-10%	19	10.0	6.0	A4B	B4B	-

Three blank columns are filled with the lead and packaging codes. Please refer to the 3 columns on the right for the appropriate code.


2

Specifications and Test Methods

2

No.	Item		Specifications	Testing Method														
1	Operating Temperature Range		-25 to +125°C															
2	Appearance and Dimensions		No marked defect on appearance form and dimensions are within specified range.	The capacitor should be visually inspected for evidence of defect. Dimensions should be measured with slide calipers.														
3	Marking		To be easily legible.	The capacitor should be visually inspected.														
4	Dielectric Strength	Between Lead Wires	No failure.	The capacitor should not be damaged when DC voltage of 200% of the rated voltage (DC1 to 3.15kV) or DC voltage of 250% of the rated voltage (DC250V, DC500V) is applied between the lead wires for 1 to 5 sec. (Charge/Discharge current ≤ 50mA.)														
		Body Insulation	No failure.	The capacitor is placed in the container with metal balls of diameter 1mm so that each lead wire, shortcircuited, is kept about 2mm off the metal balls as shown in the figure at right, and AC1250V (r.m.s.) <50/60Hz> is applied for 1 to 5 sec. between capacitor lead wires and metal balls. (Charge/Discharge current ≤ 50mA.) 														
5	Insulation Resistance (I.R.)	Between Lead Wires	Char. R[DC1 to 3.15kV], Char. C : 10000MΩ min. Char. R[DC250V] : 1000MΩ min.	The insulation resistance should be measured with DC500±50V (Char. R[DC 250V]: DC100±15V) within 60±5 sec. of charging.														
6	Capacitance		Within specified tolerance.	The capacitance should be measured at 20°C with 1±0.2kHz and AC5V(r.m.s.) max.														
7	Dissipation Factor (D.F.)		Char. R[DC250V] : 0.4% max. Char. R[DC1 to 3.15kV] : 0.2% max. Char. C : 0.3% max.	The dissipation factor should be measured at 20°C with 1±0.2kHz and AC5V(r.m.s.) max.														
8	Temperature Characteristics		<table border="1"> <thead> <tr> <th rowspan="2">T. C.</th> <th colspan="2">Temp. char.</th> </tr> </thead> <tbody> <tr> <td>-25 to +85°C</td> <td colspan="2">+85 to +125°C</td> </tr> <tr> <td>R</td> <td>Within ±15%</td> <td colspan="2">Within +15/-30%</td> </tr> <tr> <td>C</td> <td>Within ±20%</td> <td colspan="2"></td> </tr> </tbody> </table>	T. C.	Temp. char.		-25 to +85°C	+85 to +125°C		R	Within ±15%	Within +15/-30%		C	Within ±20%			The capacitance measurement should be made at each step specified in Table.
			T. C.		Temp. char.													
-25 to +85°C	+85 to +125°C																	
R	Within ±15%	Within +15/-30%																
C	Within ±20%																	
<p>Pre-treatment : Capacitor should be stored at 125±3°C for 1 hr., then placed at *room condition for 24±2 hrs. before measurements.</p> <table border="1"> <thead> <tr> <th>Step</th> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> </tr> </thead> <tbody> <tr> <td>Temp.(°C)</td> <td>20±2</td> <td>-25±3</td> <td>20±2</td> <td>125±2</td> <td>20±2</td> </tr> </tbody> </table>	Step	1	2	3	4	5	Temp.(°C)	20±2	-25±3	20±2	125±2	20±2						
Step	1	2	3	4	5													
Temp.(°C)	20±2	-25±3	20±2	125±2	20±2													
9	Strength of Lead	Pull	Lead wire should not be cut off. Capacitor should not be broken.	As shown in the figure at right, fix the body of the capacitor and apply a tensile weight gradually to each lead wire in the radial direction of the capacitor up to 10N (5N for lead diameter 0.5mm), and keep it for 10±1 sec. 														
		Bending		Each lead wire should be subjected to 5N (2.5N for lead diameter 0.5mm) of weight and bent 90° at the point of egress, in one direction, then returned to its original position and bent 90° in the opposite direction at the rate of one bend in 2 to 3 sec.														
10	Vibration Resistance	Appearance	No marked defect.	The capacitor should be firmly soldered to the supporting lead wire and vibrated at a frequency range of 10 to 55Hz, 1.5mm in total amplitude, with about a 1 minute rate of vibration change from 10Hz to 55Hz and back to 10Hz. Apply for a total of 6 hrs., 2 hrs. each in 3 mutually perpendicular directions.														
		Capacitance	Within specified tolerance.															
		D.F.	Char. R[DC250V] : 0.4% max. Char. R[DC1 to 3.15kV] : 0.2% max. Char. C : 0.3% max.															
11	Solderability of Leads		Lead wire should be soldered with uniform coating on the axial direction over 3/4 of the circumferential direction.	The lead wire of a capacitor should be dipped into a ethanol solution of 25wt% rosin and then into molten solder of 235±5°C for 2±0.5 sec. In both cases the depth of dipping is up to about 1.5 to 2mm from the root of lead wires.														
12	Soldering Effect	Appearance	No marked defect.	The lead wire should be immersed into the melted solder of 350±10°C up to about 1.5 to 2mm from the main body for 3.5±0.5 sec. Pre-treatment : Capacitor should be stored at 125±3°C for 1 hr., then placed at *room condition for 24±2 hrs. before initial measurements. Post-treatment : Capacitor should be stored for 24±2 hrs. at *room condition. Measurement order : Dielectric strength -> Pre-treatment -> Capacitance -> Soldering effect test -> Post-treatment -> Capacitance · Dielectric strength (Char. R[DC250V])														
		Capacitance Change	Within ±10%															
		Dielectric Strength (Between Lead Wires)	Per item 4.															

* "room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

Continued on the following page. 

Specifications and Test Methods

Continued from the preceding page.

No.	Item	Specifications	Testing Method															
13	Temperature Cycle	Appearance	No marked defect.															
		Capacitance Change	Within ±10%															
		D.F.	0.4% max.															
		I.R.	1000MΩ min.															
		Dielectric Strength (Between Lead Wires)	Per item 4.															
<p>The capacitor should be subjected to 5 temperature cycles. <Temperature cycle></p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature(°C)</th> <th>Time(min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25±3</td> <td>30</td> </tr> <tr> <td>2</td> <td>Room Temp.</td> <td>3</td> </tr> <tr> <td>3</td> <td>125±3</td> <td>30</td> </tr> <tr> <td>4</td> <td>Room Temp.</td> <td>3</td> </tr> </tbody> </table> <p>Cycle time : 5 cycle</p> <p>Pre-treatment : Capacitor should be stored at 125±3°C for 1 hr., then placed at *1room condition for 24±2 hrs. before initial measurements. Post-treatment : Capacitor should be stored for 24±2 hrs. at *1room condition. Measurement order : I.R. · Dielectric strength -> Pre-treatment -> Capacitance · D.F. -> Temperature cycle test -> Post-treatment -> Capacitance · D.F. · I.R. · Dielectric strength (Char. R[DC250V])</p>				Step	Temperature(°C)	Time(min)	1	-25±3	30	2	Room Temp.	3	3	125±3	30	4	Room Temp.	3
Step	Temperature(°C)	Time(min)																
1	-25±3	30																
2	Room Temp.	3																
3	125±3	30																
4	Room Temp.	3																
14	Humidity (Under Steady State)	Appearance	No marked defect.															
		Capacitance Change	Within ±10%															
		D.F.	0.4% max.															
		I.R.	1000MΩ min.															
<p>Set the capacitor for 500 +24/-0 hrs. at 40±2°C in 90 to 95% relative humidity. Pre-treatment : Capacitor should be stored at 125±3°C for 1 hr., then placed at *1room condition for 24±2 hrs. before initial measurements. Post-treatment : Capacitor should be stored for 1 to 2 hrs. at *1room condition. Measurement order : I.R. -> Pre-treatment -> Capacitance · D.F. -> Humidity test -> Post-treatment -> Capacitance · D.F. · I.R. (Char. R[DC250V])</p>																		
15	Humidity Loading	Appearance	No marked defect.															
		Capacitance Change	Within ±10%															
		D.F.	0.6% max.															
		I.R.	1000MΩ min.															
<p>Apply the rated voltage for 500 +24/-0 hrs. at 40±2°C in 90 to 95% relative humidity. (Charge/Discharge current≤50mA.) Pre-treatment : Capacitor should be stored at 125±3°C for 1 hr., then placed at *1room condition for 24±2 hrs. before initial measurements. Post-treatment : Capacitor should be stored for 1 to 2 hrs. at *1room condition. (Char. R[DC1 to 3.15kV], Char. C) Post-treatment : Capacitor should be stored at 125±3°C for 1 hr., then placed at *1room condition for 24±2 hrs. (Char. R[DC250V]) Measurement order : I.R. -> Pre-treatment -> Capacitance · D.F. -> Humidity loading test -> *2 I.R. -> Post-treatment -> Capacitance · D.F. (Char. R[DC250V])</p>																		
16	Life	Appearance	No marked defect.															
		Capacitance Change	Within ±10%															
		D.F.	0.4% max.															
		I.R.	Char. R[DC1 to 3.15kV], Char. C : 2000MΩ min. Char. R[DC250V] : 1000MΩ min.															
<p>Apply a DC voltage of 200% of the rated voltage (DC250V, DC500V) or DC voltage of 150% of the rated voltage (DC1 to 3.15kV) for 1000 +48/-0 hrs. at 125±2°C with a relative humidity of 50% max. (Charge/Discharge current≤50mA.) Pre-treatment : Capacitor should be stored at 125±3°C for 1 hr., then placed at *1room condition for 24±2 hrs. before initial measurements. Post-treatment : Capacitor should be stored at 125±3°C for 1 hr., then placed at *1room condition for 24±2 hrs. Measurement order : I.R. -> Pre-treatment -> Capacitance · D.F. -> Life test -> *3 I.R. -> Post-treatment -> Capacitance · D.F. (Char. R[DC250V])</p>																		

*1 "room condition" Temperature: 15 to 35°C, Relative humidity: 45 to 75%, Atmospheric pressure: 86 to 106kPa

*2 The measurement of I.R. will be held in 1 to 2 hrs. after Humidity loading test.

*3 The measurement of I.R. will be held in 12 to 24 hrs. after Life test.