

# ATC 650 Series RF Capacitors

Low ESR/High Q at Wireless Frequencies

## Features:

- Low ESR at Wireless Frequencies
- Standard EIA Sizes: 0402, 0603, 0805
- Ultra-Stable NPO Performance
- High Self Resonance Frequencies

## Applications:

- Cellular / Subscriber Products
- Wireless LAN / Wireless Local Loop
- Broadband Wireless Services
- GPS Portables
- Point-to-Point/Point-to-MultiPoint Radio

## Circuits:

- Filter Networks
- Matching Networks
- Tuning, Coupling, Bypass and DC Block



## Electrical Specifications

Parameters	Case Size L (0402)	Case Size S (0603)	Case Size F (0805)
<b>Capacitance:</b>	0.1 to 15 pF*	0.1 to 47 pF*	0.2 to 150 pF*
<b>Tolerances:</b>	0.1 to 2.2 pF: A, B, C 2.7 to 8.2 pF: B, C 10 to 15 pF: F, G, J	0.1 to 2.2 pF: A, B, C 2.7 to 8.2 pF: B, C 10 to 47 pF: F, G, J	0.2 to 2.2 pF: A, B, C 2.7 to 8.2 pF: B, C 10 to 150 pF: F, G, J
<b>Working Voltage: (WVDC)</b>	0.1 to 15 pF: 25V	0.1 to 18 pF: 200V 22 to 47 pF: 100V	0.2 to 100 pF: 200V 120 to 150 pF: 100V
<b>Typical Series Resonance</b>	1 pF 9.0 GHz 10 pF 3.2 GHz 15 pF 2.6 GHz	1 pF 8.5 GHz 10 pF 3.0 GHz 22 pF 2.1 GHz 47 pF 1.4 GHz	1 pF 8.0 GHz 10 pF 2.7 GHz 47 pF 1.2 GHz 100 pF 1.0 GHz 150 pF 0.8 GHz

\*Additional non-standard values available upon request.

## Common Electrical Specifications

<b>Temperature coefficient of Capacitance (TCC):</b>	0 ± 30 ppm/°C, -55°C to +125°C
<b>Insulation Resistance:</b>	10 <sup>6</sup> MΩ min. at +25°C at WVDC; 10 <sup>5</sup> MΩ min. at +125°C at WVDC
<b>Dielectric Withstanding Voltage (DWV):</b>	2.5 x WVDC min. for 5 seconds
<b>Aging</b>	None
<b>Piezo Effects</b>	None

## Common Mechanical Specifications

<b>Termination Material:</b>	Tin over nickel barrier
<b>Solderability:</b>	Solder coverage > 90% of end termination
<b>Terminal Strength:</b>	0402 – 2 lbs. Typ. 0603 – 2 lbs. Typ. 0805 – 5 lbs. Typ.

## Common Environmental Specifications

<b>Life Test:</b>	1000 hours, +125°C at 2X WVDC
<b>Thermal Shock:</b>	5 cycles, -55°C/+125°C
<b>Moisture Resistance:</b>	240 hours, 85% Relative Humidity at +85°C



**AMERICAN TECHNICAL CERAMICS**  
COMPONENT AND CUSTOM INTEGRATED PACKAGING SOLUTIONS  
FOR RF, MICROWAVE AND TELECOMMUNICATIONS

ISO 9000  
REGISTERED  
COMPANY

WWW.ATCERAMICS.COM

ATC North America  
631-622-4700  
sales@atceramics.com

ATC Europe  
+46 8 6800410  
sales@atceramics-europe.com

ATC Asia  
631-622-4700  
sales@atceramics-asia.com

ATC 001-907 Rev. D; 9/02; 1 of 8


# ATC 650 Series RF Capacitors

## Capacitance Values\*

CAP. VALUE (pF)	CAP. CODE	CASE SIZE L (0402) TOLS.	CASE SIZE S (0603) TOLS.	CASE SIZE F (0805) TOLS.	CAP. VALUE (pF)	CAP. CODE	CASE SIZE L (0402) TOLS.	CASE SIZE S (0603) TOLS.	CASE SIZE F (0805) TOLS.
0.1	0R1	A, B, C	A, B, C		5.6	5R6	B, C	B, C	B, C
0.2	0R2	A, B, C	A, B, C	A, B, C	6.8	6R8	B, C	B, C	B, C
0.3	0R3	A, B, C	A, B, C	A, B, C	8.2	8R2	B, C	B, C	B, C
0.4	0R4	A, B, C	A, B, C	A, B, C	10.0	100	F, G, J	F, G, J	F, G, J
0.5	0R5	A, B, C	A, B, C	A, B, C	12.0	120	F, G, J	F, G, J	F, G, J
0.6	0R6	A, B, C	A, B, C	A, B, C	15.0	150	F, G, J	F, G, J	F, G, J
0.7	0R7	A, B, C	A, B, C	A, B, C	18.0	180		F, G, J	F, G, J
0.8	0R8	A, B, C	A, B, C	A, B, C	22.0	220		F, G, J	F, G, J
0.9	0R9	A, B, C	A, B, C	A, B, C	27.0	270		F, G, J	F, G, J
1.0	1R0	A, B, C	A, B, C	A, B, C	33.0	330		F, G, J	F, G, J
1.2	1R2	A, B, C	A, B, C	A, B, C	39.0	390		F, G, J	F, G, J
1.5	1R5	A, B, C	A, B, C	A, B, C	47.0	470		F, G, J	F, G, J
1.8	1R8	A, B, C	A, B, C	A, B, C	56.0	560			F, G, J
2.2	2R2	A, B, C	A, B, C	A, B, C	68.0	680			F, G, J
2.7	2R7	B, C	B, C	B, C	82.0	820			F, G, J
3.3	3R3	B, C	B, C	B, C	100.0	101			F, G, J
3.9	3R9	B, C	B, C	B, C	120.0	121			F, G, J
4.7	4R7	B, C	B, C	B, C	150.0	151			F, G, J

\*Additional non-standard values available upon request.

## Outline Dimensions



Case Size	Dimensions (inches/mm)
L (0402)	L: .040 ± .004 (1.02 ± 0.1) W: .020 ± .004 (.51 ± 0.1) T: .020 ± .004 (.51 ± 0.1) Y: .010 max. (.25 max.)
S (0603)	L: .062 ± .006 (1.57 ± .15) W: .032 ± .006 (.81 ± .15) T: .030 ± .005/-.003 (.76 +.13/-.08) Y: .015 max. (.38 max.)
F (0805)	L: .080 ± .008 (2.03 ± .20) W: .050 ± .008 (1.27 ± .20) T: .040 ± .006 (1.02 ± .15) Y: .020 max. (.51 max.)

inches(mm)

## ATC Part Number Code

Series ATC 650 Case Size S Capacitance Code: 0R2 Indicates number of zeros following digits of capacitance in picofarads except for decimal values. Capacitance Tolerance B Packaging T WVDC Termination Code T

200 T

T - Tape and Reel (7" Reel) as per EIA 481  
0402: 2mm pitch, 10,000/reel  
0603: 4mm pitch, 4,000/reel  
0805: 4mm pitch, 4,000/reel

T = Tin over nickel barrier

Code	A	B	C	F	G	J
Tol.	±0.05 pF	±0.1 pF	±0.25 pF	±1%	±2%	±5%

The above part number refers to a 650S Series (case size S) 0.2 pF capacitor, B tolerance (±0.1pF), 200 WVDC, with T termination (Tin over nickel barrier) and Tape and Reel packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (631) 622-4700.

Consult factory for additional performance data.

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America 631-622-4700 sales@atceramics.com ATC Europe +46 8 6800410 sales@atceramics-europe.com ATC Asia 631-622-4700 sales@atceramics-asia.com

# ATC 650 Series RF Capacitors


## Typical Performance Data

## Case Size L - 0402


650L ESR vs Capacitance

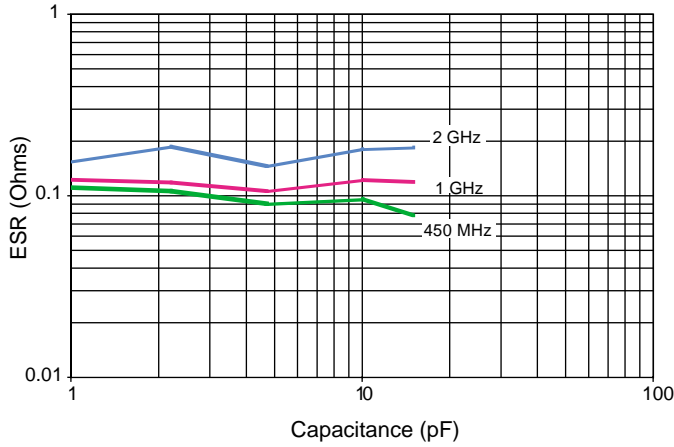


650L Q vs Capacitance

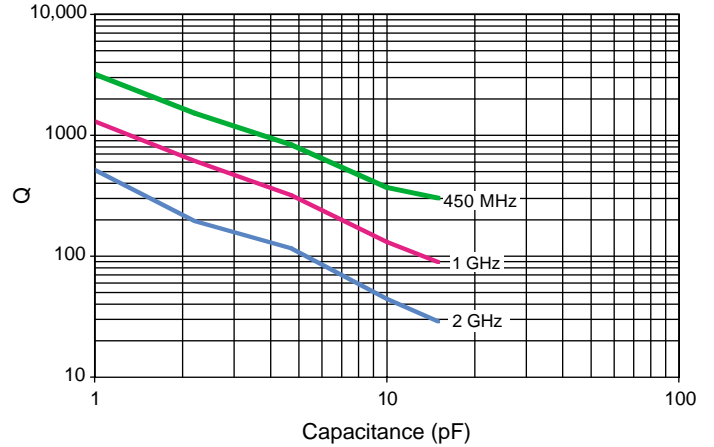

650L ESR vs Frequency

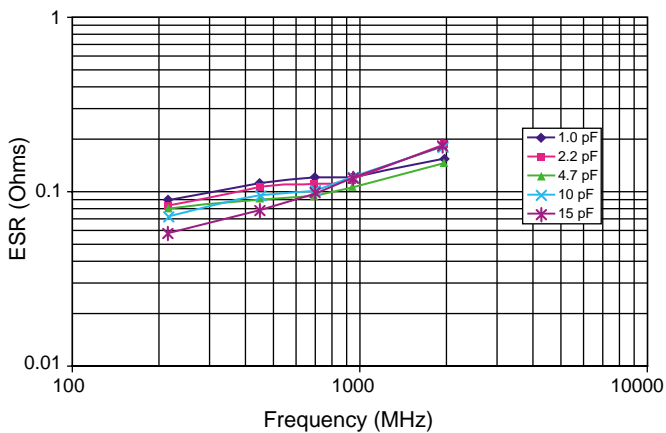

650L FSR & FPR

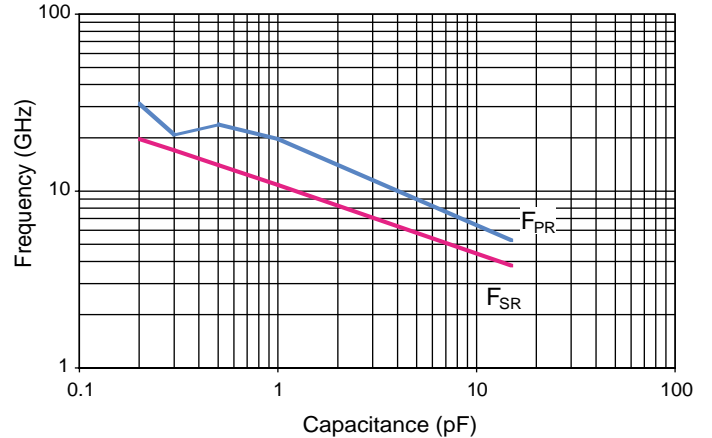

A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America  
631-622-4700 sales@atceramics.com

ATC Europe  
+46 8 6800410 sales@atceramics-europe.com


ATC Asia  
631-622-4700 sales@atceramics-asia.com

# ATC 650 Series RF Capacitors


## Typical Performance Data

## Case Size S - 0603


650S ESR vs Capacitance

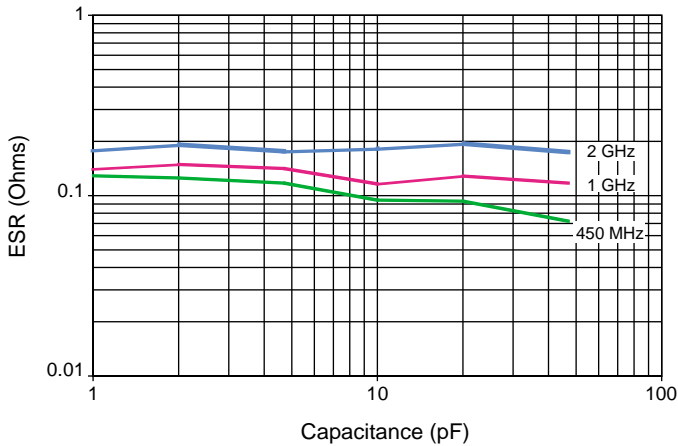


650S Q vs Capacitance

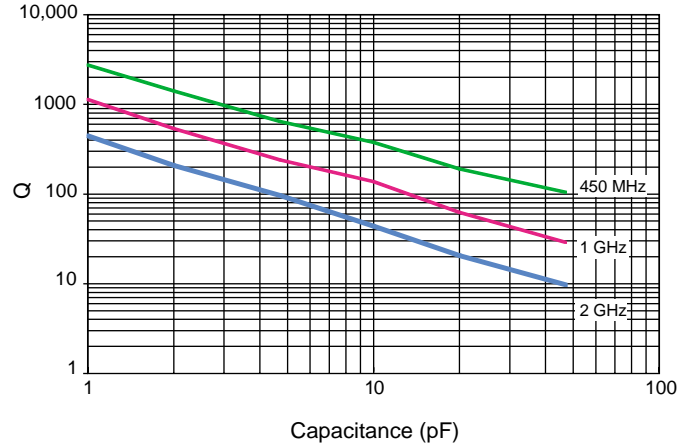

650S ESR vs Frequency

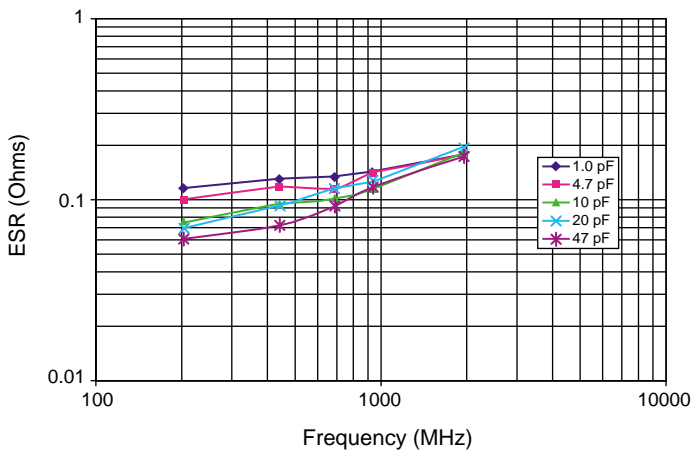

650S FSR & FPR

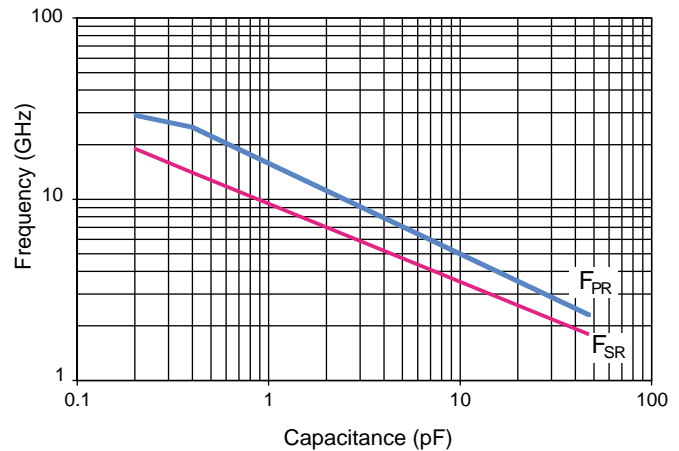

**A M E R I C A N T E C H N I C A L C E R A M I C S**

**ATC North America**  
631-622-4700 sales@atceramics.com

**ATC Europe**  
+46 8 6800410 sales@atceramics-europe.com


**ATC Asia**  
631-622-4700 sales@atceramics-asia.com

# ATC 650 Series RF Capacitors


## Typical Performance Data

## Case Size F - 0805


650F ESR vs Capacitance

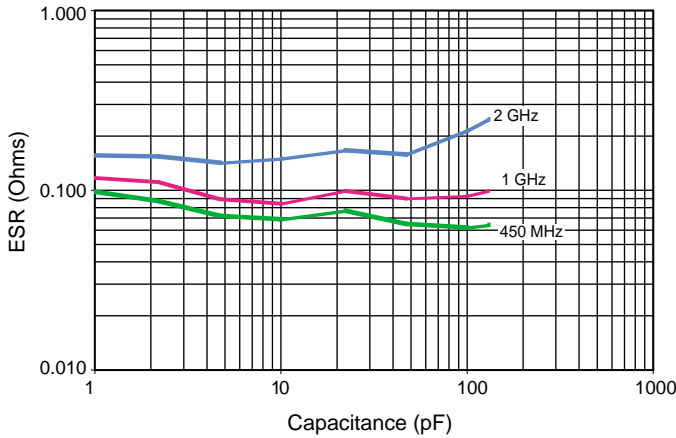


650F Q vs Capacitance

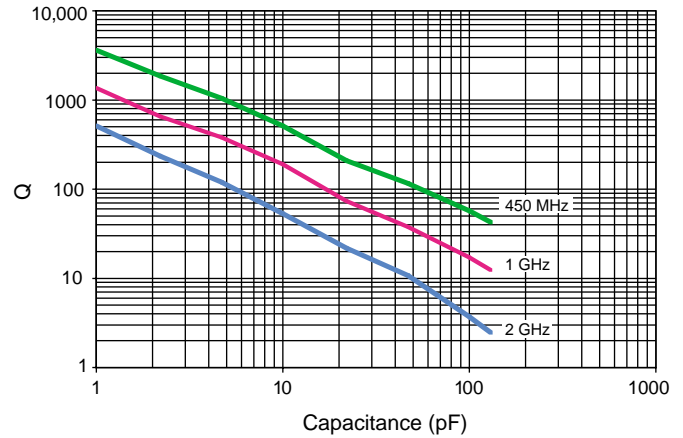

650F ESR vs Frequency

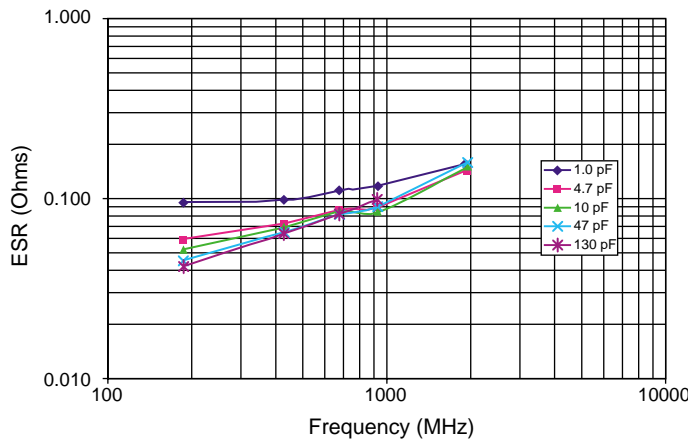

650F FSR & FPR

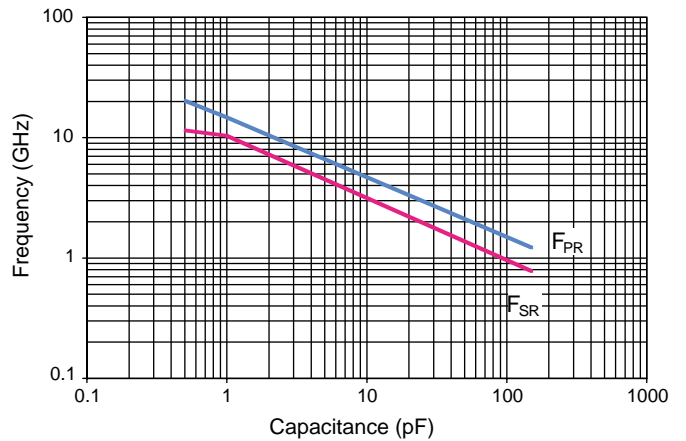

### ATC 650 Series Data Sheet Test Condition Description

Capacitors horizontally mounted on 25-mil thick alumina microstrip substrates (50-mils for 650F), 24-mil-wide traces (48 mils for 650F).

**FSR** = lowest frequency at which S11 response, referenced at capacitor edge, crosses real axis on Smith Chart. (FSR at or above values indicated.)

**FPR** = lowest frequency at which there is a notch in S21 magnitude response.

For further information, see Application Notes, ATC doc. #001-929.

## A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America  
631-622-4700 sales@atceramics.com

ATC Europe  
+46 8 6800410 sales@atceramics-europe.com

ATC Asia  
631-622-4700 sales@atceramics-asia.com

# ATC 650 Series RF Capacitors: Design Kits



Kit #	Item #	Description	Cap. Value Range (pF)	Cap. Values (pF)	Tol. (pF)	Price
Kit 19	DK0019	650L RF Capacitors 13 different values, 15 pcs. min. per value	0.2 to 2.2	0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0, 1.2, 1.5	±0.1	\$75.00
				1.8, 2.2	±0.25	
Kit 20	DK0020	650L RF Capacitors 14 different values, 15 pcs. min. per value	1.0 to 15	1.0, 1.2, 1.5, 1.8, 2.2, 2.7, 3.3	±0.1	\$75.00
				3.9, 4.7, 5.6, 6.8, 8.2	±0.25	
				10, 15	±5%	
Kit 21	DK0021	650S RF Capacitors 15 different values, 15 pcs. min. per value	0.2 to 3.3	0.2, 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0, 1.2, 1.5	±0.1	\$75.00
				1.8, 2.2, 2.7, 3.3	±0.25	
Kit 22	DK0022	650S RF Capacitors 14 different values, 15 pcs. min. per value	3.9 to 47	3.9, 4.7, 5.6, 6.8, 8.2	±0.1	\$75.00
				10, 12, 15, 18, 22, 27, 33, 39, 47	±5%	
Kit 23	DK0023	650F RF Capacitors 16 different values, 15 pcs. min. per value	0.5 to 10	0.5, 0.6, 0.8, 1.0, 1.2, 1.5, 1.8, 2.2, 2.7, 3.3	±0.1	\$75.00
				3.9, 4.7, 5.6, 6.8, 8.2	±0.25	
				10	±5%	
Kit 24	DK0024	650F RF Capacitors 15 different values, 15 pcs. min. per value	10 to 150	10, 12, 15, 18, 22, 27, 33, 39, 47, 56, 68, 82, 100, 120, 150	±5%	\$75.00

**Also Available:**

Lab Kit #5, ATC Part Number LK0005; 650 Kit – contains Kit 19, Kit 20, Kit 21, Kit 22, and Kit 24. (See Above listing)

**A M E R I C A N T E C H N I C A L C E R A M I C S**

ATC North America  
631-622-4700 sales@atceramics.com

ATC Europe  
+46 8 6800410 sales@atceramics-europe.com

ATC Asia  
631-622-4700 sales@atceramics-asia.com

# Notes:

**A M E R I C A N T E C H N I C A L C E R A M I C S**


**ATC North America**  
631-622-4700 sales@atceramics.com

**ATC Europe**  
+46 8 6800410 sales@atceramics-europe.com

**ATC Asia**  
631-622-4700 sales@atceramics-asia.com

---

w w w . a t c e r a m i c s . c o m



**AMERICAN TECHNICAL CERAMICS**  
COMPONENT AND CUSTOM INTEGRATED PACKAGING SOLUTIONS  
FOR RF, MICROWAVE AND TELECOMMUNICATIONS

[WWW.ATCERAMICS.COM](http://WWW.ATCERAMICS.COM)

ATC North America  
631-622-4700  
[sales@atceramics.com](mailto:sales@atceramics.com)

ATC Europe  
+46 8 6800410  
[sales@atceramics-europe.com](mailto:sales@atceramics-europe.com)

ATC Asia  
631-622-4700  
[sales@atceramics-asia.com](mailto:sales@atceramics-asia.com)

*ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product line without prior notice.*