


Multilayer Ceramic Chip Capacitors

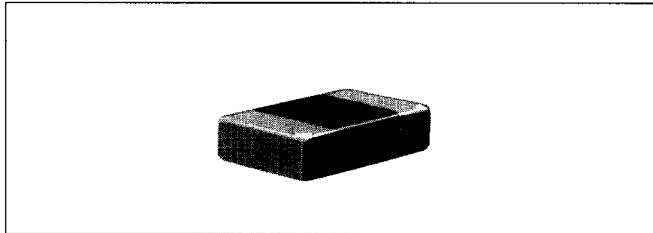

FEATURES

- COG is an ultra-stable dielectric offering a Temperature Coefficient of Capacitance (TCC) of $0 \pm 30\text{PPM}/^\circ\text{C}$ over the entire temperature range.
- Low Dissipation Factor (DF).
- Ideal for critical timing and tuning applications.

GENERAL SPECIFICATIONS

NOTE: Electrical characteristics @ + 25°C unless otherwise specified.

Capacitance Range: 1.0pF to 680pF.

Temperature Coefficient of Capacitance (TCC):
 $0 \pm 30\text{PPM}/^\circ\text{C}$ from - 55°C to + 125°C.

Dissipation Factor (DF):
 0.1% maximum @ 1.0 Vrms and 1kHz for values > 1000pF.
 0.1% maximum @ 1.0 Vrms at 1MHz for values \leq 1000pF.

Insulation Resistance (IR):


@ + 25°C and rated voltage 100,000 Megohms minimum or 1000 ohm-farads, whichever is less.

@ + 125°C and rated voltage 10,000 Megohms minimum or 100 ohm-farads, whichever is less.

Dielectric Withstanding Voltage (DWV):

250% of rated voltage for 5 ± 1 seconds, 50 milliamps current maximum.

ORDERING INFORMATION

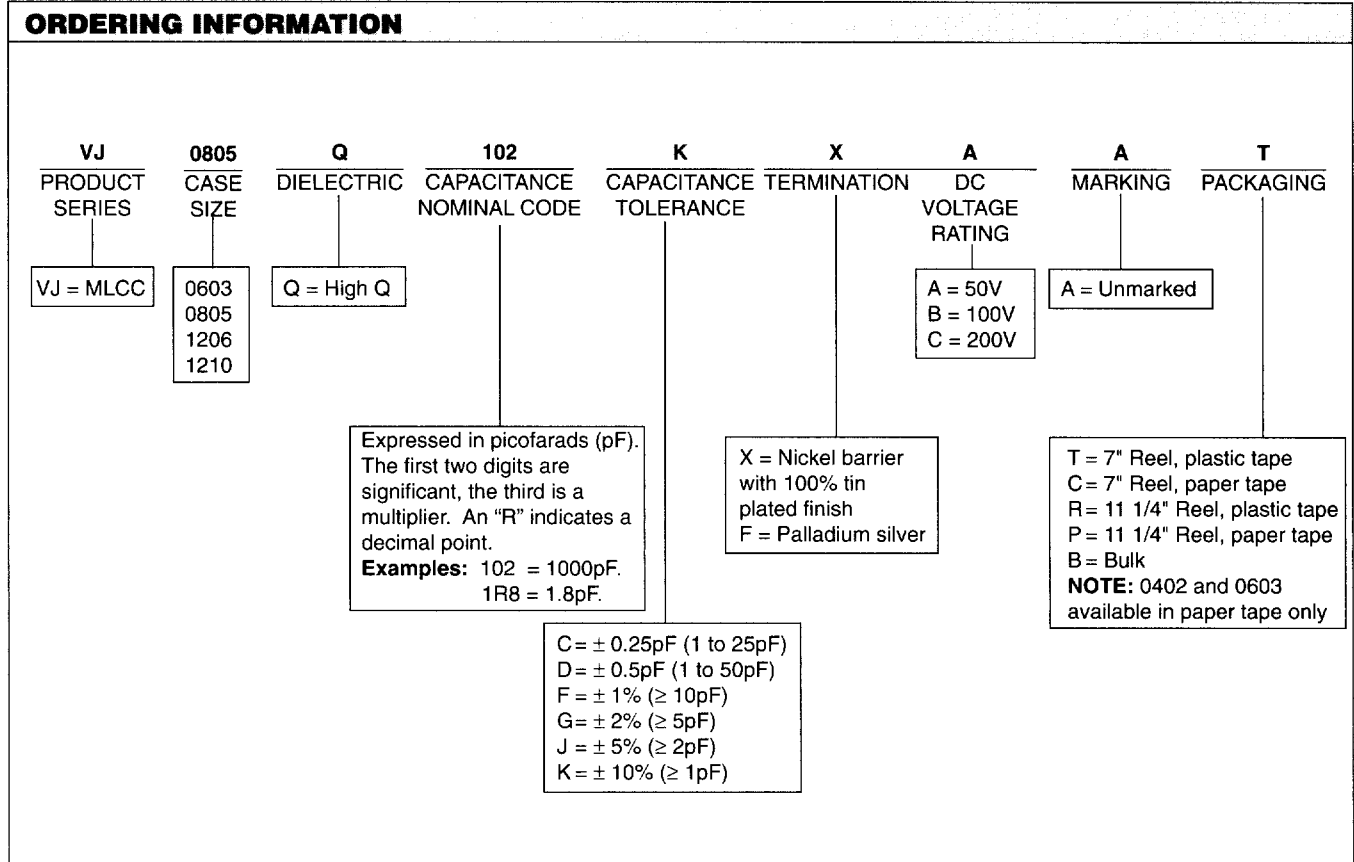

High Q Dielectric

Vishay Vitramon



HIGH Q DIELECTRIC													
STYLE		VJ0603			VJ0805			VJ1206			VJ1210		
E.I.A. TYPE		0603			0805			1206			1210		
VOLTAGE (VDC)		50	100	—	50	100	200	50	100	200	50	100	200
Capacitance Code	Capacitance pF												
1R0	1.0												
1R2	1.2												
1R5	1.5												
1R8	1.8												
2R2	2.2												
2R7	2.7												
3R3	3.3												
3R9	3.9												
4R7	4.7												
5R6	5.6												
6R8	6.8												
8R2	8.2												
100	10												
120	12												
150	15												
180	18												
220	22												
270	27												
330	33												
390	39												
470	47												
560	56												
680	68												
820	82												
101	100												
121	120												
151	150												
181	180												
221	220												
271	270												
331	330												
391	390												
471	470												
561	560												
681	680												
821	820												



HIGH Q - DIELECTRIC TYPICAL PARAMETERS

