


## UT-047C

Standard copper 50 ohm semi-rigid cables feature low attenuation and VSWR covering the entire microwave spectrum. With numerous connector options available off-the-shelf, this family of cables is one of the most versatile available today. They meet the demands of package density and provide total shielding for elimination of signal loss and noise.

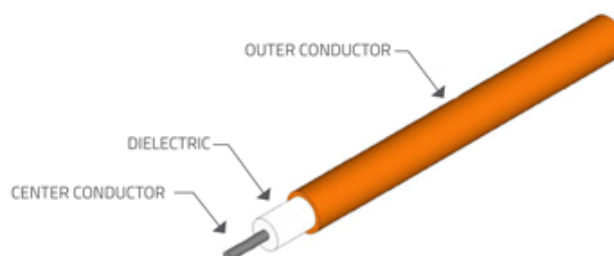

### DIMENSIONS

	UNITS	UT-047C
Outer Conductor Diameter	In	0.047 ± 0.001
	mm	1.194 ± 0.025
Dielectric Diameter	In	0.037 ± 0.001
	mm	0.940 ± 0.025
Center Conductor Diameter	In	0.0113
	mm	0.2870
length (maximum)	Feet	20
	Meter	6.10

### MATERIALS

Outer Conductor		Copper
Outer Conductor Plating		None
Dielectric		PTFE
Center Conductor		SPC
Rohs Compliant		YES

### MECHANICAL CHARACTERISTICS

Outer Conductor Integrity Temp.	°C	175
Operating Temperature (Max)	°C	150
Inside Bend Radius (Minimum)	In	0.125
	mm	3.175
Weight	lbs / 100ft	0.40
	kg / 100m	0.60

### ELECTRICAL CHARACTERISTICS

Characteristic Impedance	ohm	50
Capacitance	pF/ ft	29.0
	pF/ m	95.2
Corona Extinction Voltage	VRMS @ 60 Hz	1000
Voltage Withstanding	VRMS @ 60 Hz	3000
Higher Order Mode Frequency	GHz	109.0
Attenuation (Db / 100 Ft Typical)	0.5 GHz	24
	1.0 GHz	34.2
	5.0 GHz	78.8
	10.0 GHz	113.8
	18.0 GHz	156.5
	26.5 GHz	193.8
	40.0 GHz	244.2
	50.0 GHz	277.5
	65.0 GHz	323
	90.0 GHz	391.3
Power (Watts Cw @ 20 °C, Maximum)	0.5 GHz	80.5
	1.0 GHz	56.6
	5.0 GHz	24.7
	10.0 GHz	17.2
	18.0 GHz	12.6
	26.5 GHz	10.2
	40.0 GHz	8.1
	50.0 GHz	7.2
	65.0 GHz	6.2
	90.0 GHz	5.1