

Surface Mount Frequency Mixer

RMS-11X+ RMS-11X

Level 7 (LO Power + 7dBm) 5 to 1900 MHz



CASE STYLE: TT240


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

LO	1
RF	5
IF	4
GROUND	2,3,6


Outline Drawing

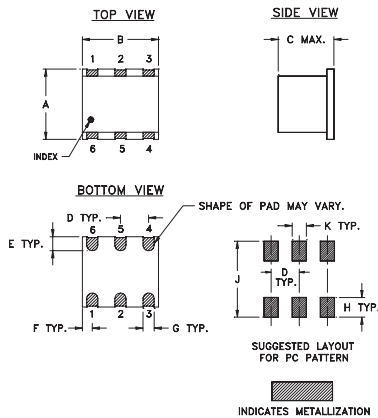

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.250	.31	.20	.100	.050	.055	
6.35	7.87	5.08	2.54	1.27	1.40	
G	H	J	K			wt
.040	.070	.270	.050			grams
1.02	1.78	6.86	1.27			0.50

Demo Board MCL P/N: TB-03
Suggested PCB Layout (PL-052)

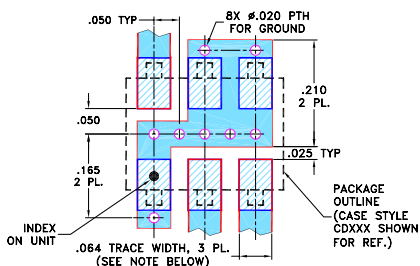

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- excellent L-R isolation, 35 dB typ.
- conversion loss, 7.1 dB typ.
- small size, 0.25"x0.31"x0.2"

Applications

- PCN
- satellite distribution
- GPS

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)		LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)									
	LO/RF	IF	L	M	U	L	M	U										
$f_L - f_U$	\bar{X}	σ	Total Range Max.						Typ.									
5-1900	5-1000	7.1	.10	8.2	9.8	58	45	35	20	27	18	56	45	37	20	27	20	10


1 dB COMP.: +1 dBm typ.
For phase detection, DC output positive with in-phase RF & LO.

L = low range [f_L to $10 f_L$]
M = mid band [$2 f_L$ to $f_U/2$]
U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	
						RF
5.00	35.00	6.69	57.72	66.80	1.21	2.98
10.01	40.01	6.67	57.22	64.98	1.22	2.83
50.04	80.04	6.66	51.74	53.60	1.23	2.78
103.56	73.56	6.72	46.56	47.68	1.23	2.75
189.86	159.86	6.79	42.32	43.39	1.26	2.72
241.95	211.95	6.90	40.60	41.62	1.31	2.59
308.34	278.34	7.00	38.96	39.89	1.32	2.59
392.94	362.94	7.11	37.54	38.49	1.37	2.56
500.75	470.75	7.20	35.72	37.03	1.44	2.60
638.14	608.14	6.65	34.40	36.08	1.52	2.53
720.38	690.38	7.33	33.17	35.36	1.54	2.52
918.04	888.04	7.35	31.46	34.64	1.53	2.61
950.00	920.00	7.26	30.90	34.39	1.54	2.63
1036.36	1006.36	7.24	30.00	34.46	1.52	2.68
1200.00	1170.00	7.58	30.35	34.77	1.40	2.79
1320.71	1290.71	7.59	32.03	34.21	1.34	2.90
1500.00	1470.00	7.67	35.10	33.40	1.26	2.89
1800.00	1770.00	8.36	38.63	32.68	1.42	3.62
1850.00	1820.00	8.56	36.54	32.31	1.47	3.73
1900.00	1870.00	8.80	34.84	32.78	2.04	3.94

Electrical Schematic

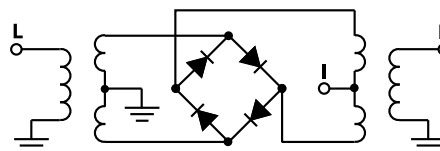

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. B
M102713
RMS-11X
070425
Page 1 of 2

Performance Charts

