

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### DESCRIPTION

Low ESR, Ultra High-Q  
 Highest working voltage in class - 1'500V  
 Porcelain Capacitors  
 Laser Marked (optional)  
 High Self-Resonance Frequencies



### APPLICATIONS

- Cellular Base Station Amplifiers
- Industrial
- Medical (MRI)
- Scientific

### CIRCUIT APPLICATIONS

- DC to RF Conversion
- Matching Networks
- Tuning, Coupling and DC Blocking

## I. ELECTRICAL SPECIFICATIONS

Parameter	Value
Capacitance	0.1 to 1'000 pF
Tolerances	A, B, C, D below 10 pF F, G, J, K, M above 10 pF
Working Voltage (WVDC)	see Capacitance Value chart
Temperature Coefficient	100 +/-30ppm/°C, -55°C to + 125°C
Insulation Resistance	10 <sup>6</sup> MΩ min
Dielectric Withstanding (test voltage applied for 5 seconds)	2.5 x WVDC for WVDC ≤ 500V 1.5 x WVDC for 500V < WVDC
Aging	none
Piezo Effects	none

NB: the temperature range for the CHB up to 100pF is upgraded from +125°C to +175°C.

## II. MECHANICAL SPECIFICATIONS

Parameter	Value	Comment
Case Size	A	0505
	B	1111

For each case size, the recommended terminations are listed below.

NB:

- all the terminations are backward compatible and lead-free.
- the non-magnetic terminations are all Magnetism-free Rated.

**MR** certified®

**ITAR** Free®

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant


Termination Type	Code	CHA	CHB
Standard (tin-plated nickel)	S	AVAILABLE	AVAILABLE
Non-magnetic (tin-plated copper)	C	AVAILABLE	AVAILABLE

### III. ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Life Test	2'000 hours, +125°C at 2.0 x WVDC (standard WVDC range)
Moisture Resistance Test 1	240 hours, 85% relative humidity at +85°C (ESA/SCC n°3009)
Moisture Resistance Test 2	56 days, 93% relative humidity at +40°C 0V, 5V, WVDC

### IV. OUTLINE DIMENSIONS

Parameter	A (0505)	B (1111)
Length (L)	1.40 ±0.25mm	2.80 ±0.40mm
Width (W)	1.40 ±0.25mm	2.80 ±0.40mm
Thickness (T)	1.40 mm (max.)	2.60 mm (max.)
End-Band (e)	0.25 ±0.15mm	0.40 ±0.25mm

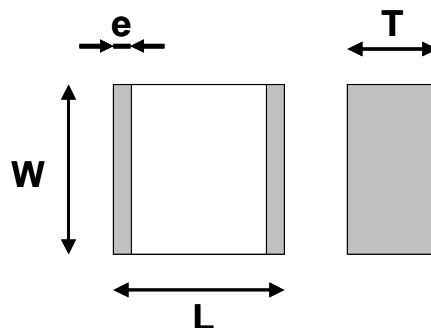

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### V. HOW TO ORDER

152	CH	B	100	J	S		L	E	ROHS
voltage	dielectric	case size	capacitance	tolerance code	termination code	mechanical code	marking code	tape and reel	
please refer to Volt.Code given in Capacitance Values chart		A B	please refer to Cap. Code given in Capacitance Values chart	A=±0.05pF B=±0.1pF C=±0.25pF D=±0.5pF F=±1% G=±2% J=±5% K=±10%	please refer to Mechanical Specification chart	please refer to Mechanical Configuration chart	"L" means laser marking requested  leave blank if no marking requested	"E" means horizontal orientation  "X" means vertical orientation  leave blank if no tape and reel requested	the RoHS tag is not part of the reference  tag added at the end of P/N for information
500=50V 101=100V 201=200V 301=300V 501=500V 601=600V 102=1KV 152=1.5KV						leave blank if no mechanical requested			

NB: for capacitance values lower than 10pF, tolerances A, B, C and D apply. For capacitance values equal to or higher than 10pF, tolerances F, G, J and K apply;

### VI. TAPE AND REEL

The following chart gives the number of components per reel.

	CHA	CHB
Parts per Reel	3'000	1'000

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### VII. CAPACITANCE VALUES

Value (pF)	Cap. Code	A (0505)	B (1111)		Value (pF)	Cap. Code	A (0505)	B (1111)	
			Standard	Extended				Standard	Extended
0,1	0R1	250V	500V	1500V	18	180	250V	500V	1500V
0,2	0R2				20	200			
0,3	0R3				22	220			
0,4	0R4				24	240			
0,5	0R5				27	270			
0,6	0R6				30	300			
0,7	0R7				33	330			
0,8	0R8				36	360			
0,9	0R9				39	390			
1,0	1R0				43	430			
1,1	1R1				47	470			
1,2	1R2				51	510			
1,3	1R3				56	560			
1,4	1R4				62	620			
1,5	1R5				68	680			
1,6	1R6				75	750			
1,7	1R7	82	820						
1,8	1R8	91	910						
1,9	1R9	100	101	200V	100	101			
2,0	2R0	110	111						
2,1	2R1	120	121						
2,2	2R2	130	131						
2,4	2R4	150	151						
2,7	2R7	160	161						
3,0	3R0	180	181						
3,3	3R3	200	201						
3,6	3R6	220	221						
3,9	3R9	240	241						
4,3	4R3	270	271						
4,7	4R7	300	301						
5,1	5R1	330	331						
5,6	5R6	360	361						
6,2	6R2	390	391						
6,8	6R8	430	431						
7,5	7R5	470	471						
8,2	8R2	510	511						
9,1	9R1	560	561						
10	100	620	621						
11	110	680	681						
12	120	750	751						
13	130	820	821						
15	150	910	911						
16	160	1 000	102						
								300V	
								100V	
								50V	
									600V
									1000V
									300V







NB: special values, tolerances, higher WVDC and matching available, please consult factory. Dielectric withstanding test is done at 1.8 x WVDC for Extended Range values  $\geq 820\text{pF}$ .

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### VIII. MECHANICAL CONFIGURATIONS

#### VIII.1. Lead/Ribbon and Wire Types

Configuration Type	Code	Description
	1	Micro-strip Ribbon
	2	Axial Ribbon
	3	Radial Ribbon
	5	Narrow Micro-strip Ribbon
	6	Radial Wire
	7	Axial Wire

NB: when coding ribbons or wires for the description of the part, the termination has to be mentioned for MR<sub>certified</sub> types to ensure that only non-magnetic materials are used.

Examples :    501 CHB 470 J1L                    any termination material could be used  
                   501 CHB 470 JC1L                only non-magnetic termination materials could be used

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### VIII.2. Lead/Ribbon and Wire Matrix

Termination Type	Code	CHA	CHB
Micro-strip Ribbon	1		AVAILABLE <sup>(2)</sup>
Axial Ribbon	2		AVAILABLE <sup>(3)</sup>
Radial Ribbon	3		AVAILABLE
Narrow Micro-strip Ribbon	5		AVAILABLE
Radial Wire	6		AVAILABLE <sup>(1)</sup>
Axial Wire	7		AVAILABLE <sup>(1)</sup>

(1) values 0R1 0R2 and 0R3 non available with this termination. Non ROHS terminations.

(2) value 0R1 non available with this termination

(3) values 0R1 0R2 and 0R3 non available with this termination

### VIII.3. Lead/Ribbon and Wire Dimensions

Within each cell, first the length and then the width/diameter of any single ribbon or wire are given.

Termination Type	Code	CHA	CHB
Micro-strip Ribbon	1		8.00 2.40
Axial Ribbon	2		8.00 2.40
Radial Ribbon	3		8.00 2.40
Narrow Micro-strip Ribbon	5		8.00 1.27
Radial Wire	6		20.00 0.60
Axial Wire	7		20.00 0.60



NB: dimensions are in mm, length is the minimum value.

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### IX. PERFORMANCE DATA



#### IX.1. ESR

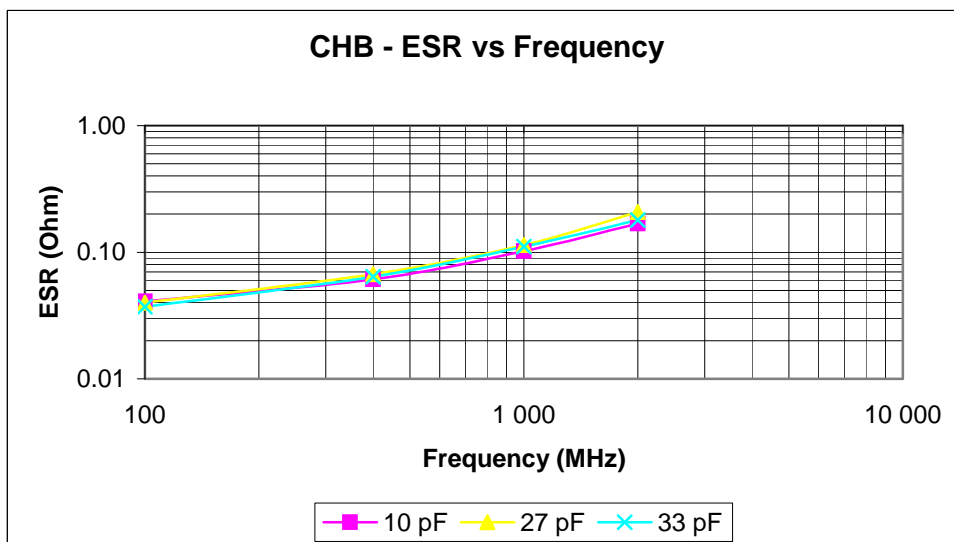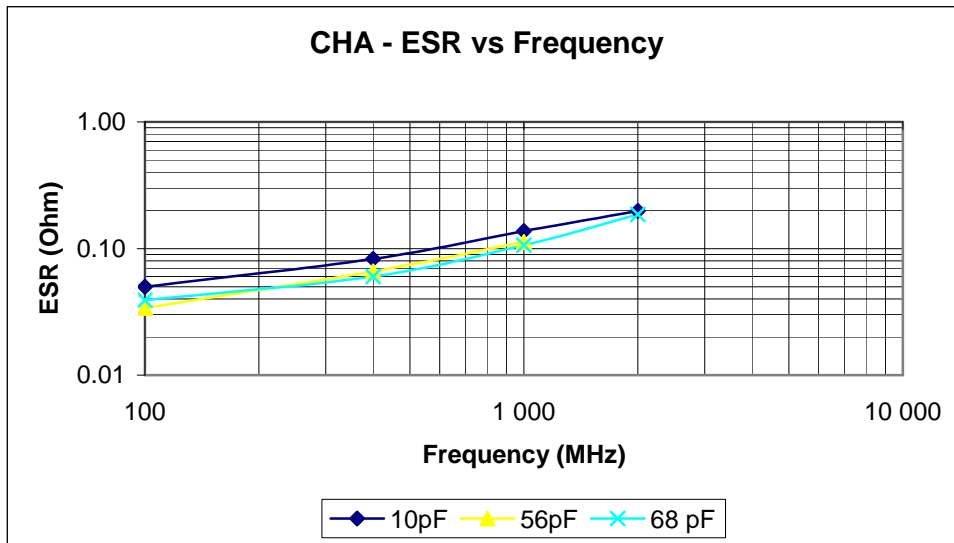

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### IX.2. Current Rating

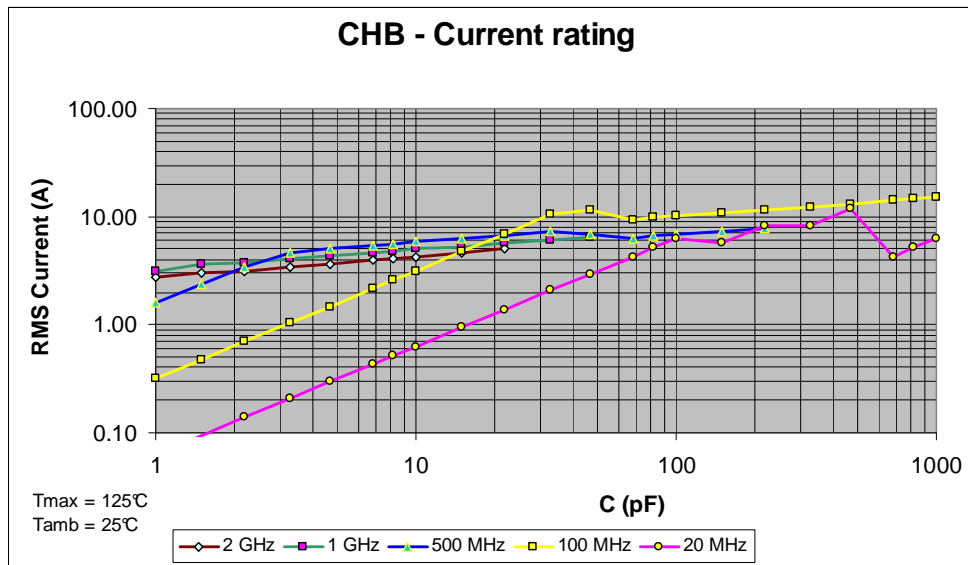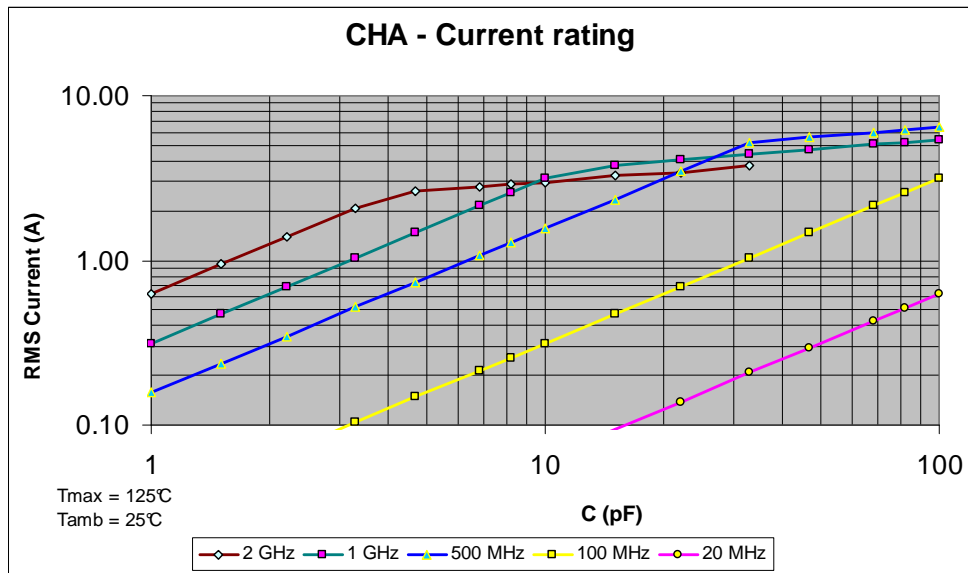



TEMEX CERAMICS reserves the right to modify herein specifications and information at any time when necessary to provide optimum performance and cost.



# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### IX.3. Q Factor

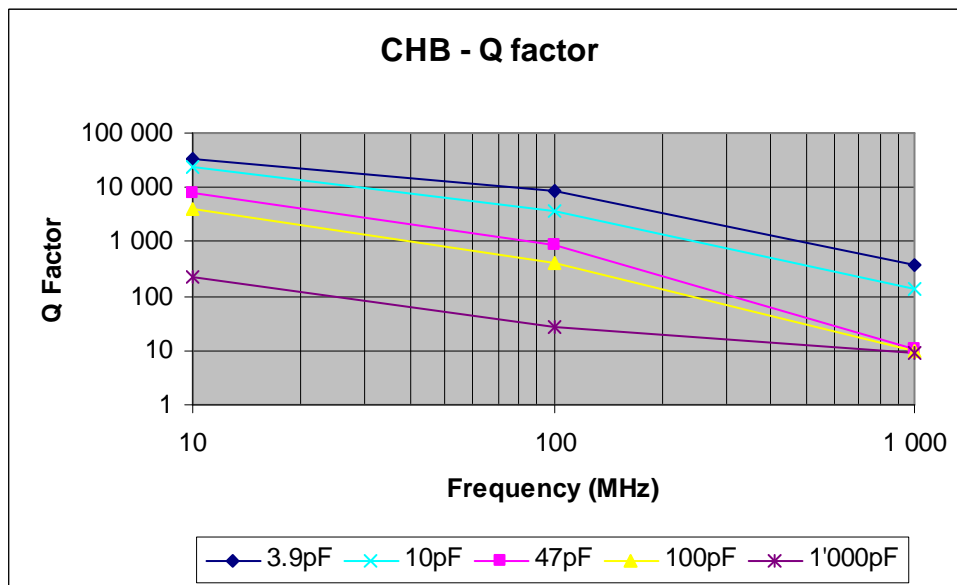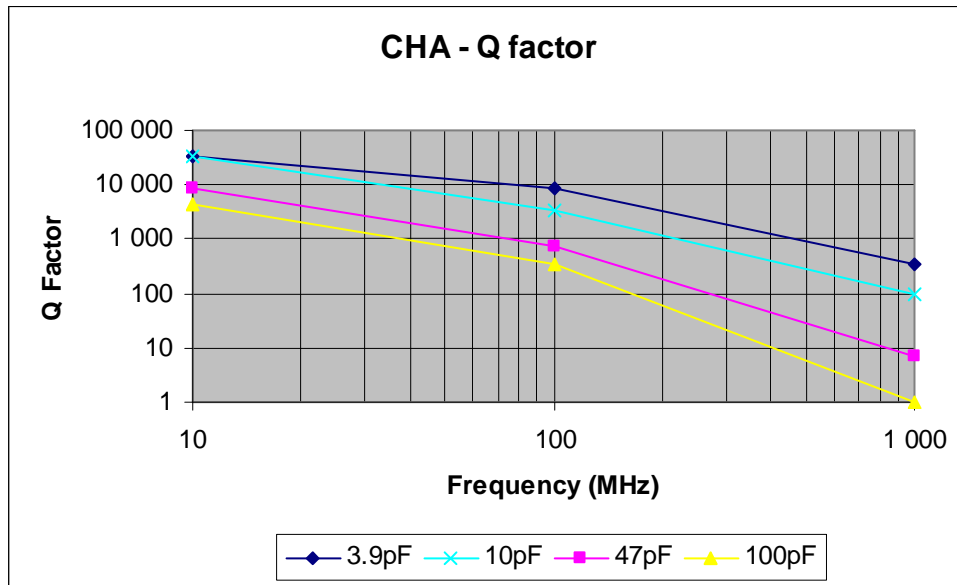

TEMEX CERAMICS reserves the right to modify herein specifications and information at any time when necessary to provide optimum performance and cost.

# Classic-HiQ Series, Low ESR

## RF & Microwave Capacitors, RoHS Compliant

### IX.4. Series Resonance Frequency

