


07 SERIES



- Installs easily by hand
- Narrow width less than .250 (6.4mm)
- Ideal for high density applications
- Material: UL94V-2 (E70062)

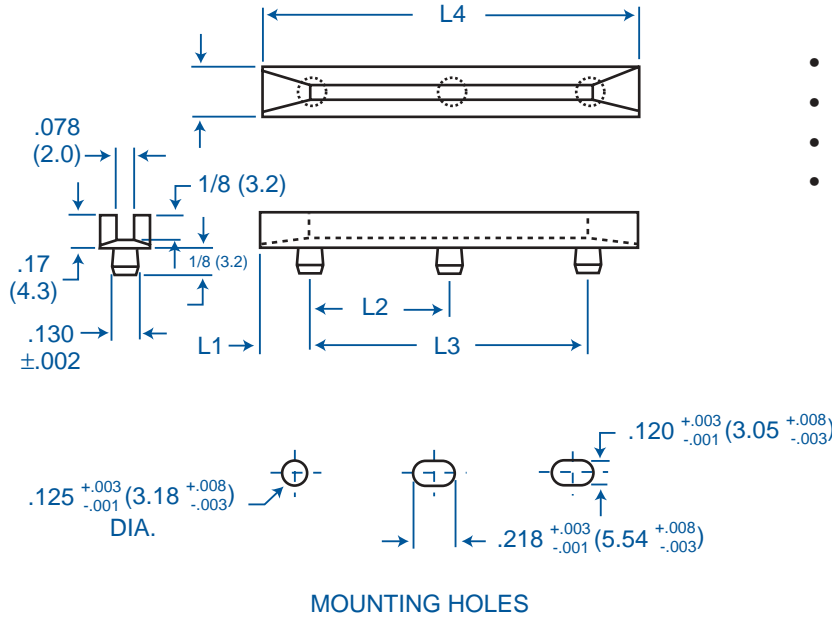

ITEM NO. 14-07-Series	
COLOR:	Natural
PACKAGING:	100/bag
MATERIAL:	Nylon 66

ITEM NO. UL94V-2	L ₁		L ₂		L ₃		L ₄		W		Chassis Thickness	
	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)	inches	(mm)
14-07-2250					2.0	(50.8)	2.5	(63.5)				
14-07-2300					2.5	(63.5)	3.0	(76.2)				
14-07-2350					3.0	(76.2)	3.5	(88.9)				
14-07-2400					3.5	(88.9)	4.0	(101.6)				
14-07-2450					4.0	(101.6)	4.5	(114.3)				
14-07-2500					4.5	(114.3)	5.0	(127.0)				
14-07-2550	.250	(6.4)			5.0	(127.0)	5.5	(139.7)	.245	(6.2)	.048 - .085	(1.22 - 2.12)
14-07-2600					5.5	(139.7)	6.0	(152.4)				
14-07-2650					6.0	(152.4)	6.5	(165.1)				
14-07-2700					6.5	(165.1)	7.0	(177.8)				
14-07-2750					7.0	(177.8)	7.5	(190.5)				
14-07-2800					7.5	(190.5)	8.0	(203.2)				
14-07-2850					8.0	(203.2)	8.5	(215.9)				
14-07-3700			3.25	(82.6)	6.5	(165.1)	7.0	(177.8)				
14-07-3750	.250	(6.4)	3.5	(88.9)	7.0	(177.8)	7.5	(190.5)	.245	(6.2)	.048 - .085	(1.22 - 2.12)
14-07-3800			3.75	(95.3)	7.5	(190.5)	8.0	(203.2)				
14-07-3850			4.0	(101.6)	8.0	(203.2)	8.5	(215.9)				
Tolerance ±			.015	(.375)	.025	(.635)	.030	(.76)				