

# E-Series 2-Way 90° Power Divider

## 55 - 90 MHz

**ESQ-2-90**

V3.00

### Features

- 2-Way
- 90°

### Specifications @25°C

Frequency Range	55 - 90 MHz	
Insertion Loss	Typical	Maximum
55 - 90 MHz	0.3 dB	0.7 dB
Isolation	Typical	Minimum
55 - 90 MHz	30 dB	20 dB
Amplitude Unbalance	Maximum	
55 - 90 MHz	1.2 dB	
Phase Unbalance	Maximum	
55 - 90 MHz	3°	

### Operating Characteristics

Impedance	50 Ohms Nominal
-----------	-----------------


### Ordering Information

Part No.	Packaging
ESQ-2-90	Tube

### Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 sec)	260°C
Storage Temperature	-55°C to 100°C

### R-2

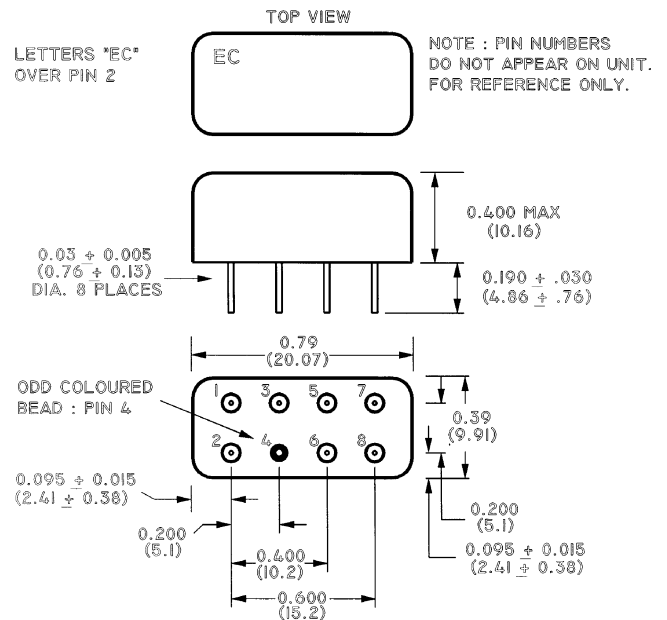

WEIGHT (APPROX.): 0.23 OUNCES 6.5 GRAMS

### Pin Configuration

Function	Pin No.
Not Connected	3,4,7,8
External 50 Ohms	6
Input	1
Port 1	2
Port 2	5

S 0125 B

Specifications Subject to Change Without Notice.

**M/A-COM, Inc.**

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595  
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020