

**DATASHEET**



**ELECTRICAL SPECIFICATIONS:**





Frequency range	dc - 11 GHz
Impedance	50 Ω
Voltage rating	500 V max. @ 50 Hz
Insulation resistance	5000 MΩ min.
Temperature range	-65 / +165 °C
Life time	500 mating
VSWR	≤ 1.3

**MATERIAL SPECIFICATIONS:**

	Materials	Finishes
Connector body	Brass	Nickel plating
Center contact	Brass	Gold plating
Insulator	PTFE	-

**CABLE GROUP:**

RG142 / RG142A / RG142B / RG223 / RG400 / RG55

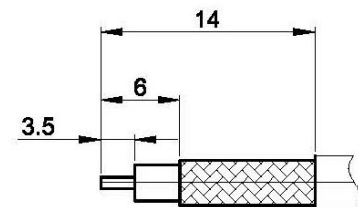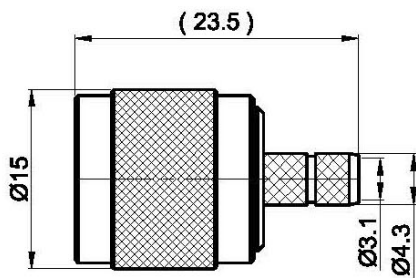

STRIPPING CABLE