




QPL Fixed Coaxial Attenuators

2082 Series

MIL-A-3933/25

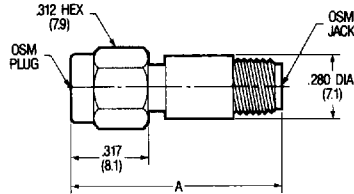

4

Military Part Number	M/A-COM Part Number	Outline	Dim. A Max. Inches (mm)	Attenuation Value (dB) Nom.	Frequency Range (GHz)	Commercial Alternate
-16	2082-4384-16N	4	1.03 (26.2)	16	dc - 2.0	2082-6013-16
-17	2082-4384-17N	4	1.03 (26.2)	17	dc - 2.0	2082-6013-17
-18	2082-4384-18N	4	1.03 (26.2)	18	dc - 2.0	2082-6013-18
-19	2082-4384-19N	4	1.03 (26.2)	19	dc - 2.0	2082-6013-19
-20	2082-4384-20N	4	1.03 (26.2)	20	dc - 2.0	2082-6013-20
-21	2082-4384-21N	4	1.03 (26.2)	21	dc - 2.0	2082-6014-21
-22	2082-4384-22N	4	1.03 (26.2)	22	dc - 2.0	2082-6014-22
-23	2082-4384-23N	4	1.03 (26.2)	23	dc - 2.0	2082-6014-23
-24	2082-4384-24N	4	1.03 (26.2)	24	dc - 2.0	2082-6014-24
-25	2082-4384-25N	4	1.03 (26.2)	25	dc - 2.0	2082-6014-25
-26	2082-4384-30N	4	1.03 (26.2)	30	dc - 2.0	2082-6014-30
-27	2082-4383-01N	4	.87 (22.1)	1	dc - 12.4	2082-6020-01
-28	2082-4383-02N	4	.87 (22.1)	2	dc - 12.4	2082-6020-02
-29	2082-4383-03N	4	.87 (22.1)	3	dc - 12.4	2082-6020-03
-30	2082-4383-04N	4	.87 (22.1)	4	dc - 12.4	2082-6021-04
-31	2082-4383-05N	4	.87 (22.1)	5	dc - 12.4	2082-6021-05
-32	2082-4383-06N	4	.87 (22.1)	6	dc - 12.4	2082-6021-06
-33	2082-4383-07N	4	.87 (22.1)	7	dc - 12.4	2082-6022-07
-34	2082-4383-08N	4	.87 (22.1)	8	dc - 12.4	2082-6022-08
-35	2082-4383-09N	4	.87 (22.1)	9	dc - 12.4	2082-6022-09
-36	2082-4383-10N	4	.87 (22.1)	10	dc - 12.4	2082-6022-10
-37	2082-4383-11N	4	.87 (22.1)	11	dc - 12.4	2082-6023-11
-38	2082-4383-12N	4	.87 (22.1)	12	dc - 12.4	2082-6023-12
-39	2082-4383-13N	4	.94 (23.9)	13	dc - 12.4	2082-6023-13*
-40	2082-4383-14N	4	.94 (23.9)	14	dc - 12.4	2082-6023-14*

M/A-COM part number reflects non-screened unit. For screened unit, change "N" to "S."

Specifications Subject to Change Without Notice.

M/A-COM Inc. ■ 1011 Pawtucket Boulevard, Lowell, MA 01853 USA

■ Telephone: 800-366-2266