


MIL-S-3928/15-08 LATCHING SMA COAXIAL SWITCH

SPECIFICATIONS

Voltage supply	28 V
Max. current	150 mA
RF input max. frequency	25 GHz
Contact	1P2T
Max. power handling	240 W
Impedance	50 Ω

PERFORMANCES

Insertion Loss, Return Loss & Isolation

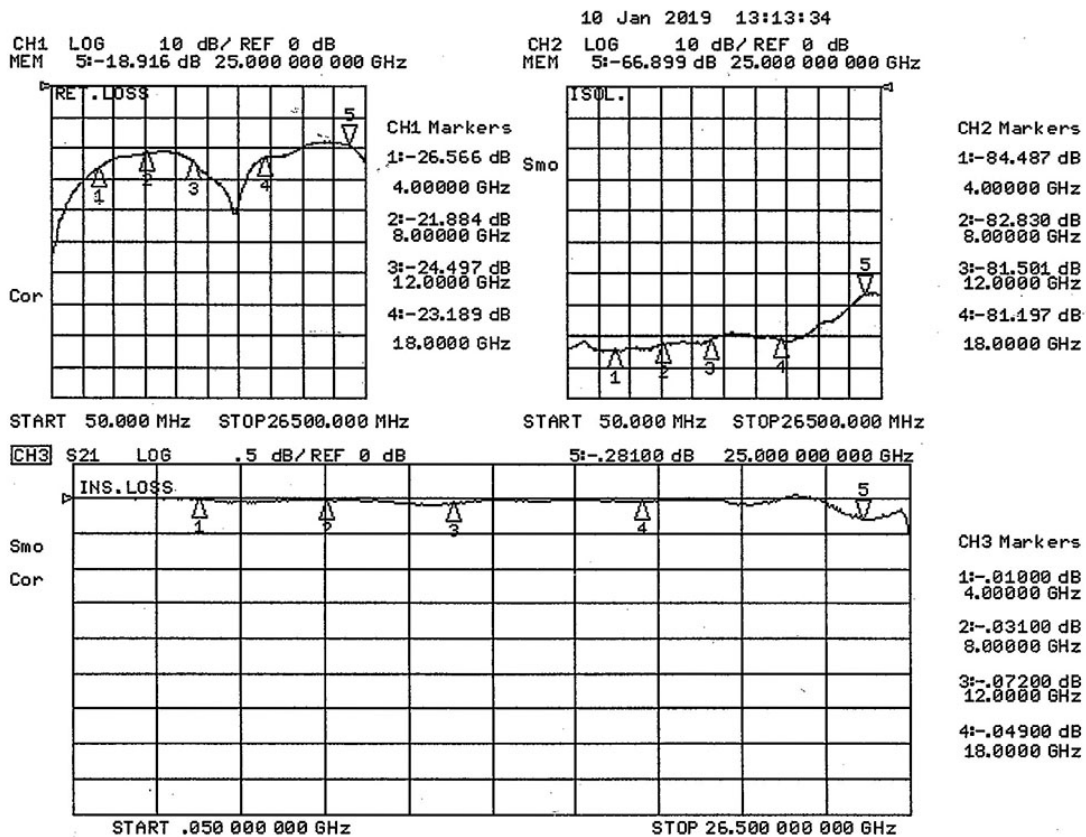

Frequency (GHz)	Insertion loss (typ.) (dB)	Return loss (typ.) (dB)	Isolation (typ.) (dB)
DC - 4	< 0.1	> 25	> 80
4 - 12	< 0.2	> 20	> 76
12 - 18	< 0.3	> 20	> 70
18 - 25	< 0.4	> 18	> 60