

DATASHEET



ELECTRICAL SPECIFICATIONS:


Frequency range	dc – 12.4 GHz
Impedance	50 Ω
Voltage rating	335 V RMS
Insulation resistance	5000 M Ω min.
Temperature range	-65 / +165 $^{\circ}$ C
Life time	500 mating

MATERIAL SPECIFICATIONS:

	Materials	Finishes
Connector body	Brass	Gold flash
Center contact	Phosphor Bronze	Gold flash
Insulator	PTFE	-

CABLE GROUP:

RG142 / RG142A / RG142B / RG223 / RG400 / RG55

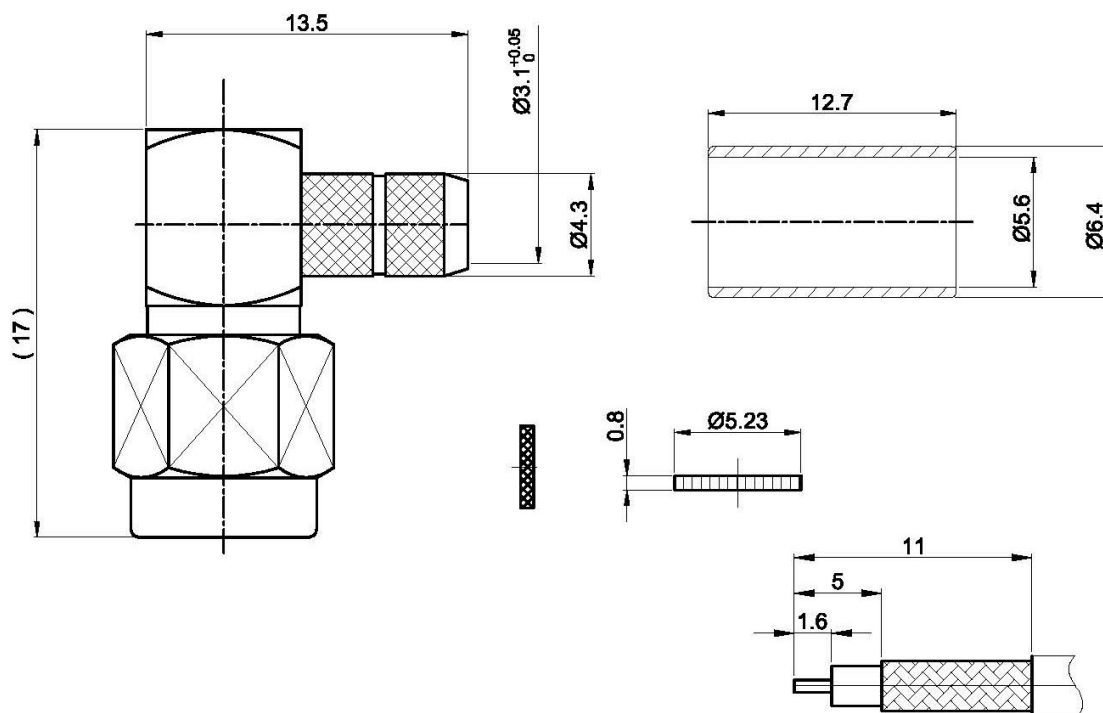

unit: mm

STRIPPING CABLE