




Add: 4/F.,Xinnuo Building, Neihua Rd.,Nanshan District,
 Shenzhen 518052, China.
 Tel: 0086 755 26483458 Fax: 0086 755 26483329
 Site: www.skymicrowave.com Email: sales@skymicrowave.com




The specification and outline drawing of

Coaxial Isolator

Model	Freq. Range (GHz) FL-Fu	Insertion Loss (dB)	Isolation (dB)	Return Loss(dB)	Package Style
		Max	Typ	Min	
SMIS12A	11.75-15.25 GHz	0.5	20	18	See below

Notes:

- a. Operating Power : 1 Watt
- b. Impedance : 50 ohms
- c. Connector : SMA-F, SMA-M
- d. Case material : Aluminum alloy with Nickel-plating,
and the logo/marks carved by laser.
- e. Operation temperature : -35C-+70C deg

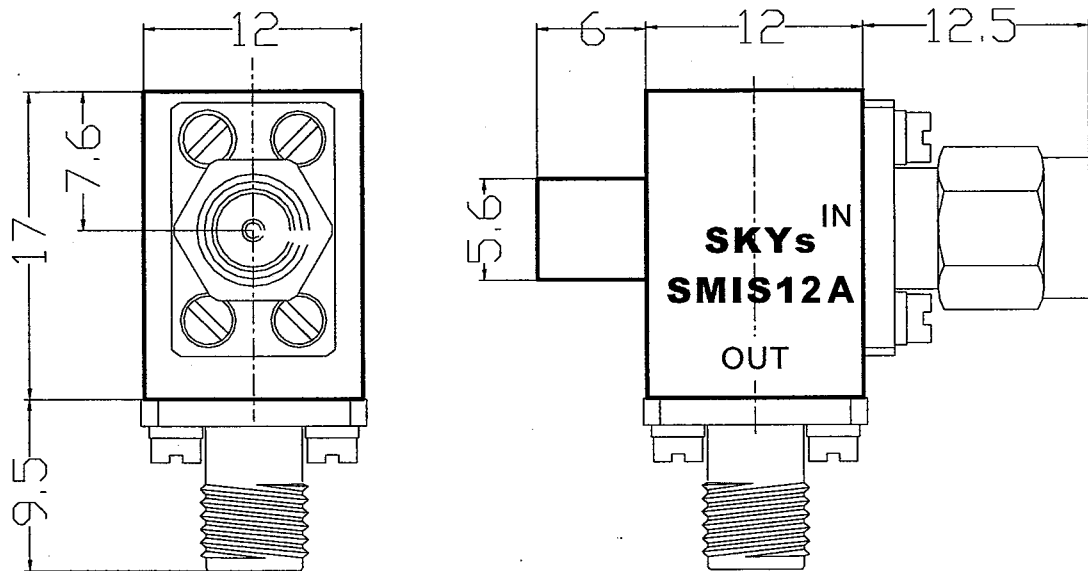

(Unit:mm)