



**BNC  
PLUG**

**N  
JACK  
BULKHEAD**

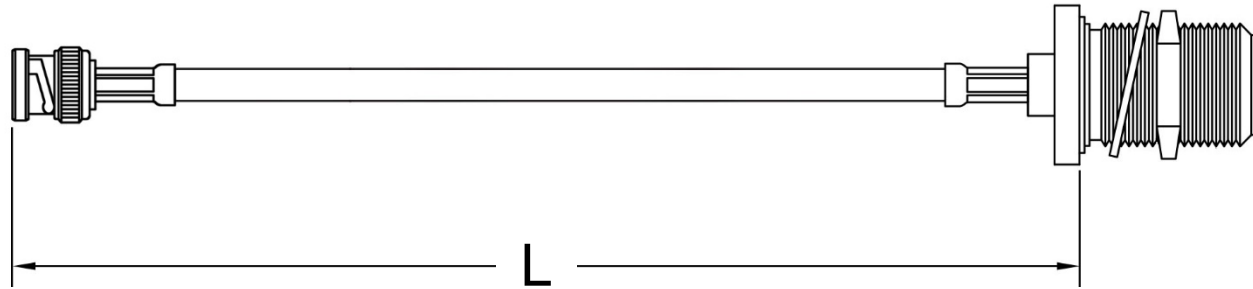

**MECHANICAL SPECIFICATIONS**

	Type	Geometry	Material & finishing		
<b>Connector 1</b>	BNC Plug	Straight	Nickel-plated Brass		
<b>Connector 2</b>	N Jack Bulkhead	Straight	Nickel-plated Brass		
	Type	Dielectric	Jacket	Ext. diam.	Op. Temp.
<b>Cable</b>	LLF240 (LMR-240)	Foam PE	PVC	6.1 mm	-40/+80 °C

**ELECTRICAL SPECIFICATIONS**

<b>Frequency range</b>	DC – 4 GHz VSWR 1.22 (20 dB RL)
<b>Impedance</b>	50 Ω

Frequency (MHz)	Typical Attenuation (dB/m)	Frequency (MHz)	Typical Attenuation (dB/m)
50	0.06	1000	0.25
150	0.10	2400	0.42
450	0.17	5500	0.75

**Part #**

**Standard length**

B02N15-04-00500	L = 50 cm
B02N15-04-00750	L = 75 cm
B02N15-04-01000	L = 100 cm
B02N15-04-01500	L = 150 cm
B02N15-04-02000	L = 200 cm
B02N15-04-03000	L = 300 cm
B02N15-04-04000	L = 400 cm
B02N15-04-05000	L = 500 cm

**Part #**

**Custom length**

B02N15-04-"L"	Replace L with cable length in mm
---------------	-----------------------------------

**Q AXIAL**  
QUALITY COAXIAL

www.qaxial.com

**RoHS  
COMPLIANT**

**B02N15-04 Series**