

**DATASHEET**



**ELECTRICAL SPECIFICATIONS:**


|                       |                      |
|-----------------------|----------------------|
| Frequency range       | dc – 11 GHz          |
| Impedance             | 50 $\Omega$          |
| Voltage rating        | 500 V RMS            |
| Insulation resistance | 5000 M $\Omega$ min. |
| Temperature range     | -65 / +165 °C        |
| Life time             | 500 mating           |

**MATERIAL SPECIFICATIONS:**

|                | Materials | Finishes       |
|----------------|-----------|----------------|
| Connector body | Brass     | Nickel plating |
| Center contact | Brass     | Gold flash     |
| Insulator      | PTFE      | -              |

**CABLE GROUP:**

RG8X / LMR240

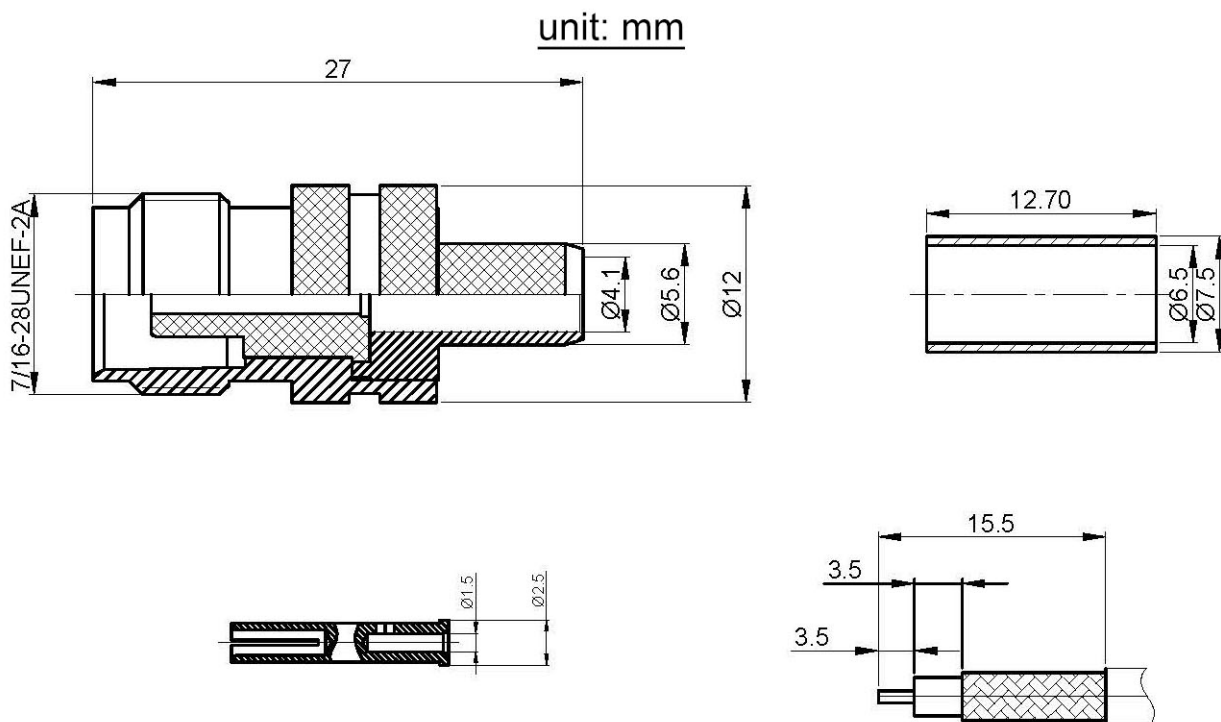

STRIPPING CABLE