


**SMA
PLUG
RIGHT ANGLE**

**SMA
PLUG
RIGHT ANGLE**

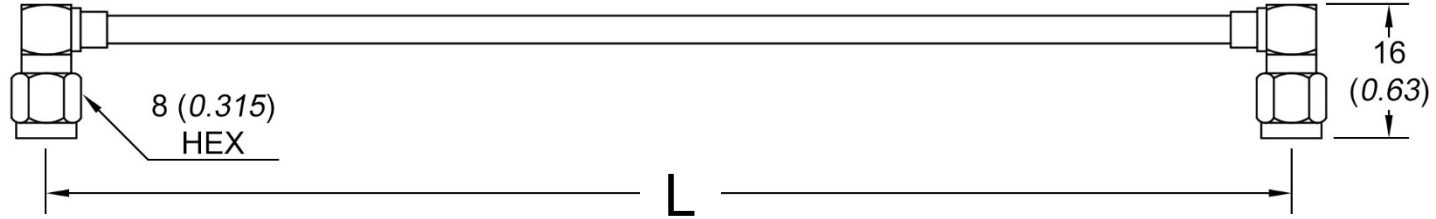

MECHANICAL SPECIFICATIONS

	Type	Geometry	Material & finishing		
Connector 1	SMA Plug	Right angle	Gold/Passiv Stainless Steel		
Connector 2	SMA Plug	Right angle	Gold/Passiv Stainless Steel		
	Type	Dielectric	Jacket	Ext. diam.	Op. Temp.
Cable	HF141-50	PTFE	-	3.52 mm	-65/+165 °C

ELECTRICAL SPECIFICATIONS

Frequency range	DC – 13 GHz VSWR 1.15 (23 dB RL)	13 – 18 GHz VSWR 1.22 (20 dB RL)
Impedance	50 Ω	

Frequency (GHz)	Typical Attenuation (dB/m)	Frequency (GHz)	Typical Attenuation (dB/m)
0.5	0.27	8.0	1.30
1.0	0.39	15.0	1.95
2.0	0.58	18.0	2.22
5.0	1.00	26.5	2.90

Part #	Standard length
S07S07-40-00100	L = 10 cm
S07S07-40-00200	L = 20 cm
S07S07-40-00300	L = 30 cm
S07S07-40-00400	L = 40 cm
S07S07-40-00500	L = 50 cm
S07S07-40-00750	L = 75 cm
S07S07-40-01000	L = 100 cm

Part #	Custom length
S07S07-40-"L"	Replace L with cable length in mm



www.qaxial.com



S07S07-40 Series