



**BNC
PLUG**

**N
JACK
BULKHEAD**

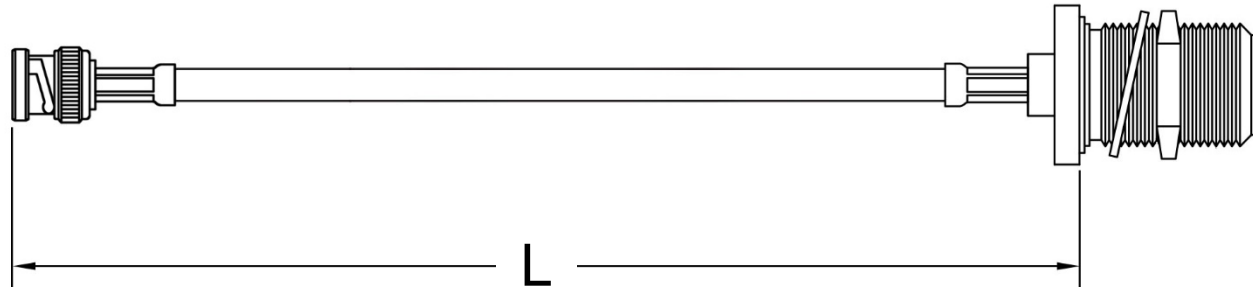

MECHANICAL SPECIFICATIONS

	Type	Geometry	Material & finishing		
Connector 1	BNC Plug	Straight	Nickel-plated Brass		
Connector 2	N Jack Bulkhead	Straight	Nickel-plated Brass		
	Type	Dielectric	Jacket	Ext. diam.	Op. Temp.
Cable	LLF240 (LMR-240)	Foam PE	PVC	6.1 mm	-40/+80 °C

ELECTRICAL SPECIFICATIONS

Frequency range	DC – 4 GHz VSWR 1.22 (20 dB RL)
Impedance	50 Ω

Frequency (MHz)	Typical Attenuation (dB/m)	Frequency (MHz)	Typical Attenuation (dB/m)
50	0.06	1000	0.25
150	0.10	2400	0.42
450	0.17	5500	0.75

Part #	Standard length
B02N15-22-00500	L = 50 cm
B02N15-22-00750	L = 75 cm
B02N15-22-01000	L = 1 m
B02N15-22-01500	L = 1.5 m
B02N15-22-02000	L = 2 m
B02N15-22-03000	L = 3 m
B02N15-22-04000	L = 4 m
B02N15-22-05000	L = 5 m
B02N15-22-10000	L = 10 m

Part #	Custom length
B02N15-22-"L"	Replace L with cable length in mm



www.qaxial.com



B02N15-22 Series