

DATASHEET



ELECTRICAL SPECIFICATIONS:


Frequency range	dc - 6 GHz
Impedance	50 Ω
Power rating	2 W
VSWR	1.20 : 1 (max.)
Operating temperature	-65 / +85 °C
Connector type	N male

MATERIAL SPECIFICATIONS:

Body and Nut	Brass / Ternary plating
Center contact	Brass / Gold plating
Insulator	PTFE



DIMENSIONS (mm):

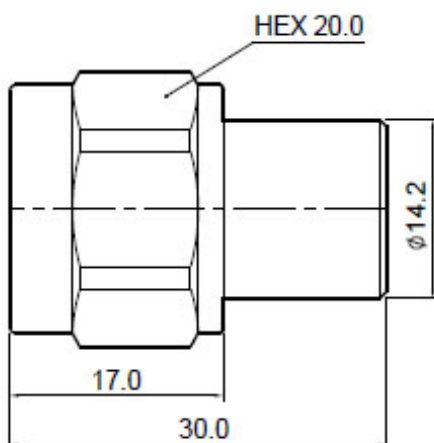

TEST DATA:

