


DATASHEET

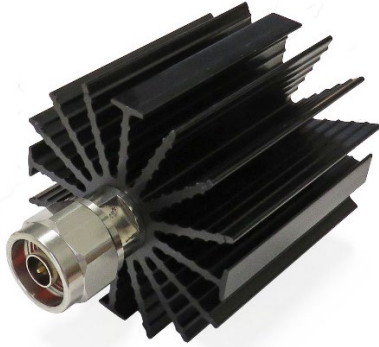

ELECTRICAL SPECIFICATIONS:

Frequency range	dc - 4 GHz
Impedance	50 Ω
Power rating	30 W
VSWR	1.20 : 1 (max.)
Operating temperature	-65 / +85 °C
Connector type	N male



MATERIAL SPECIFICATIONS:

Heat sink	Aluminium / Anodized Black
Connector body	Brass / Nickel plating
Center contact	Brass / Gold plating
Insulator	PTFE



DIMENSIONS (mm):

unit: mm

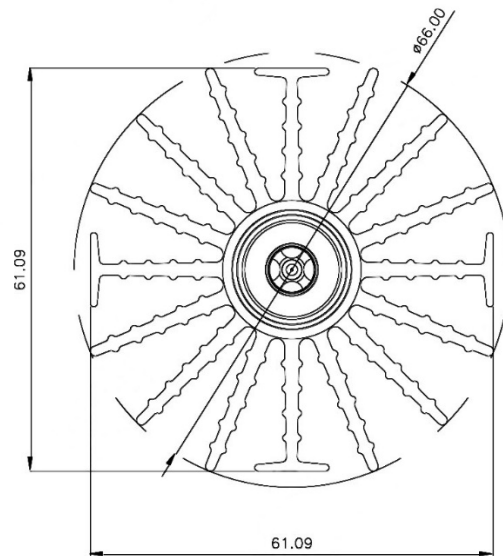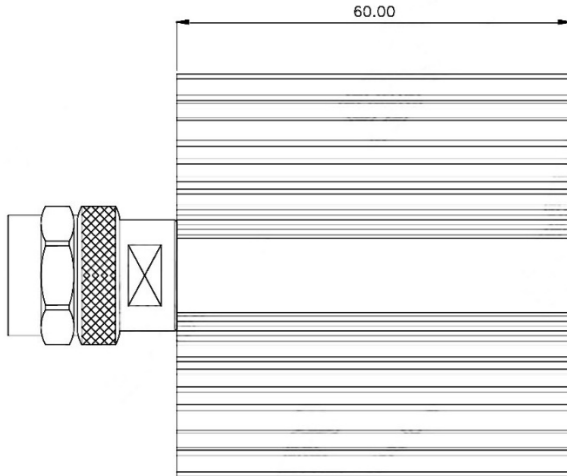

TEST DATA:

