

DATASHEET



ELECTRICAL SPECIFICATIONS:

Frequency range	dc – 4 GHz
Impedance	50 Ω
VSWR	1.3 (max.)
Voltage rating	335 V _{RMS}
Insulation resistance	5000 M Ω min.
Life time	>500 mating
Temperature range	-55 / +125 °C

MATERIAL SPECIFICATIONS:


	Materials	Finishes
Connector body	Brass	Gold plating
Center contact	BeCu	Gold plating
Insulator	PTFE	-

CABLE GROUP:

RG174 / RG188 / RG188A / RG316 / LMR100



Unit: mm

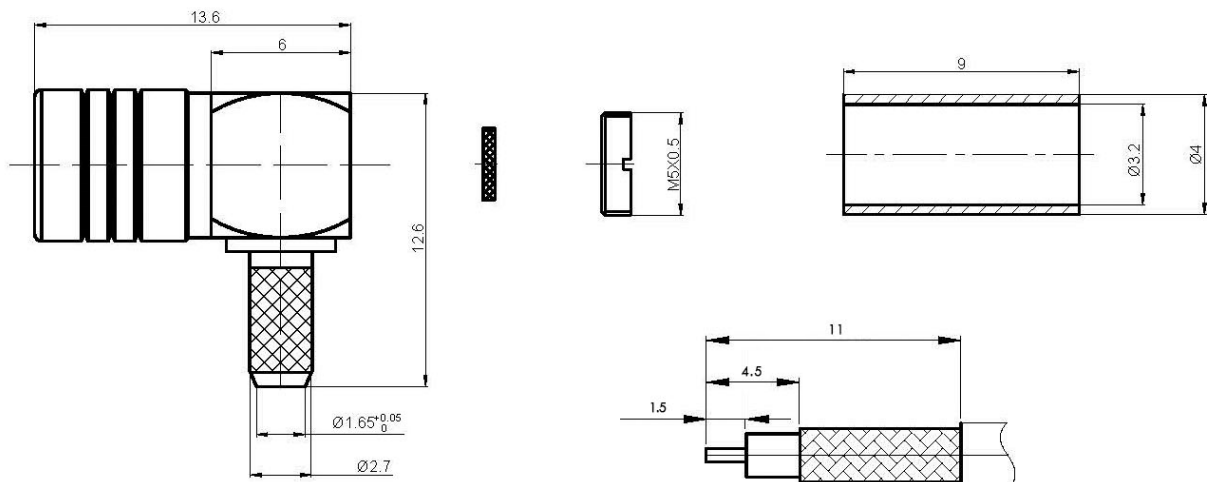

STRIPPING CABLE