


DATASHEET



ELECTRICAL SPECIFICATIONS:	
Frequency range	0.5 – 6 GHz
Impedance	50 Ω
Number of ports	6
Insertion Loss	≤2.2 dB
Input VSWR	≤1.3
Output VSWR	≤1.3
Isolation	>18 dB
Amplitude Balance	≤ ±0.8 dB
Phase Balance	≤ ±8°
Power Rating	30 W (as divider) 2 W (as combiner)
Operating Temperature	-35 / +75 °C
MECHANICAL SPECIFICATIONS:	
Input/output connectors	SMA female
Housing	Black painted Aluminum
Dimensions	115x85x10 mm
Weight	~220 g



Dimensions (Unit: mm/[inch], Tolerance: ±0.3mm)

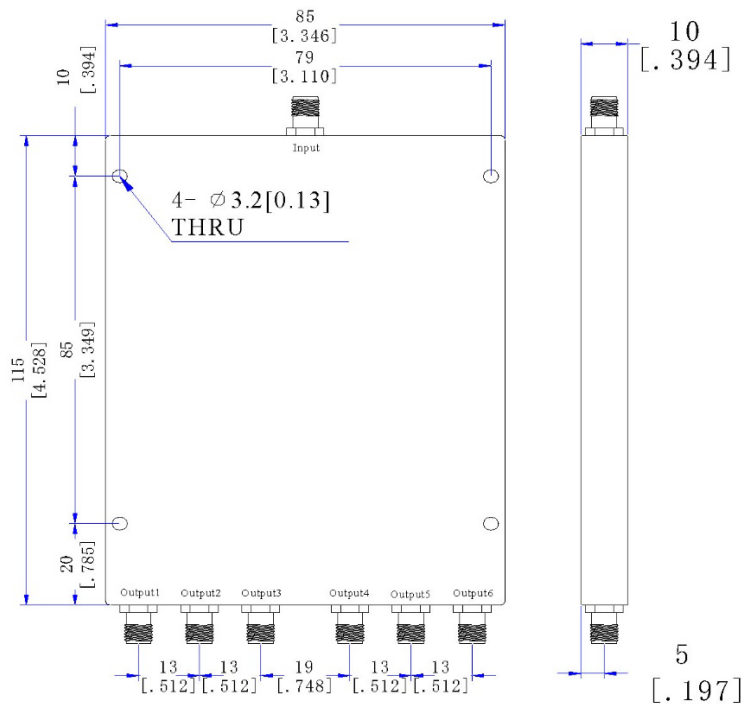

Test data (Typical)

