

DATASHEET



ELECTRICAL SPECIFICATIONS:

Frequency range	dc – 12.4 GHz
Impedance	50 Ω
Voltage rating	335 V _{RMS}
VSWR	≤ 1.18
Insulation resistance	≥ 5000 M Ω
Temperature range	-45 / +125 °C
Life time	>500 mating

MATERIAL SPECIFICATIONS:


	Materials	Finishes
Connector body	Brass	Gold plating
Center contact	Brass	Gold plating
Insulator	PTFE	-

CABLE GROUP:

085-086 SEMI-RIGID / RG405



Unit: mm

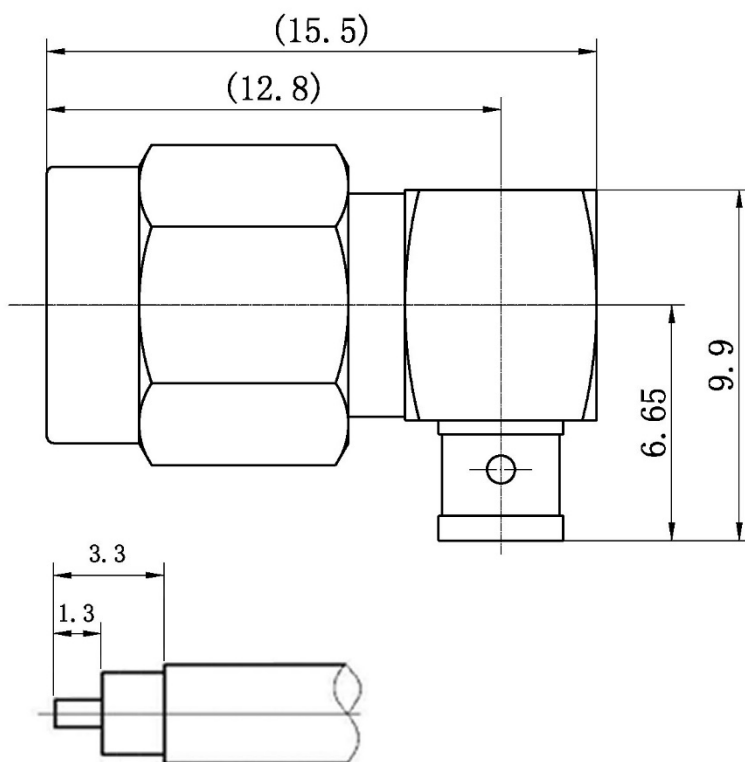

STRIPPING CABLE