

**DATASHEET**

**Electrical Specifications**


<b>Frequency range</b>	dc - 50 GHz
<b>Impedance</b>	50 Ω
<b>Power rating</b>	1 W
<b>VSWR</b>	≤1.30
<b>Operating temperature</b>	-55 / +125 °C
<b>Connector type</b>	2.4mm male
<b>Life time</b>	>500 mating



**Mechanical Specifications**

<b>Body + Nut</b>	Stainless steel / Passivated
<b>Center contact</b>	BeCu / Gold plating
<b>Insulator</b>	PEI

**Test data**

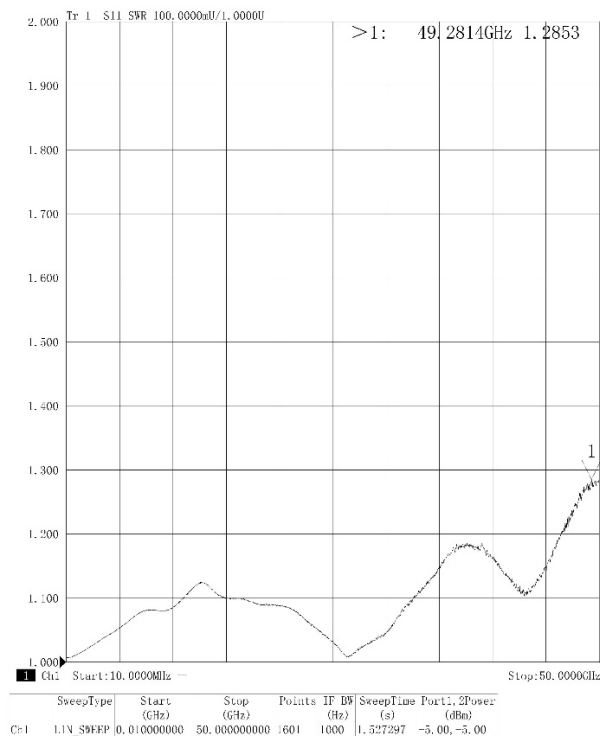

**Unit: mm**

