

DATASHEET



ELECTRICAL SPECIFICATIONS:

Frequency range	dc – 6 GHz
Impedance	50 Ω
VSWR	≤ 1.30
Working voltage	1 kV _{RMS}
Insulation resistance	5000 M Ω min.
Temperature range	-55 / +155 °C
Life time	>500 mating

MATERIAL SPECIFICATIONS:



	Materials	Finishes
Connector body	Brass	Nickel plating
Center contact	Brass	Nickel plating
Nut + washer	Brass	Nickel plating
O-ring	Rubber	-
Insulator	PTFE	-

CABLE GROUP:

141 SEMI-RIGID / RG402



Unit: mm

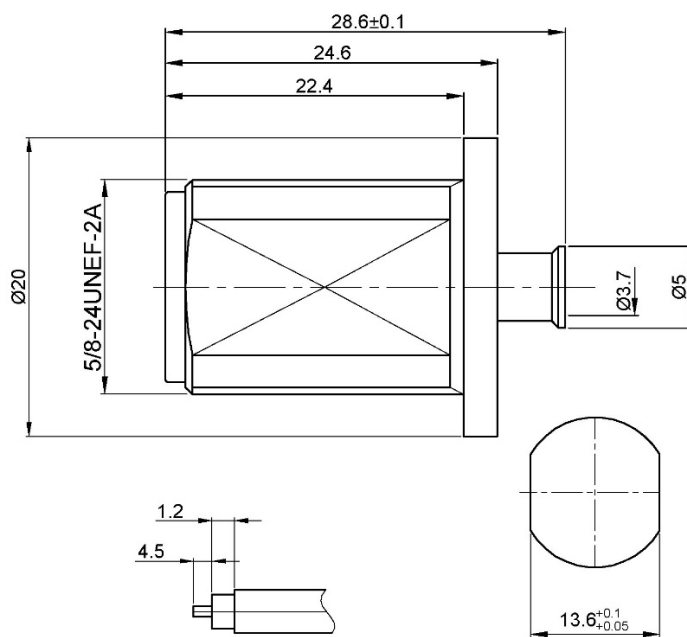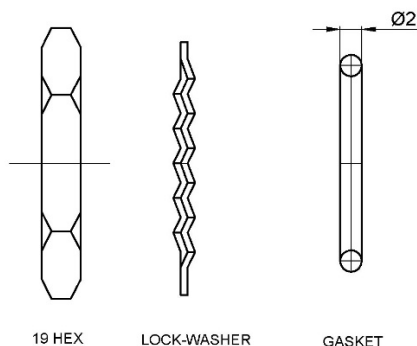

STRIPPING CABLE

RECOMMENDED
MOUNTING HOLE