

DATASHEET

PRODUCT SPECIFICATIONS

Interface 1	N
Standard 1	MIL-STD-348A
Gender 1	Male
Interface 2	PC3.5
Standard 2	IEC 60169-23
Gender 2	Female
Geometry	Straight
Panel mounting feature	-



ELECTRICAL SPECIFICATIONS

Impedance	50 Ω
Frequency range	dc – 18 GHz
VSWR	≤ 1.15

MECHANICAL SPECIFICATIONS

Durability	≥ 500 mating
Weight	33.2 g

MATERIAL SPECIFICATIONS

COMPONENT	MATERIAL	PLATING
Connector body	Stainless steel	Passivated
Center contact	BeCu (Beryllium-Copper)	Gold
Insulator	PEI (Polyetherimide)	-


ENVIRONMENTAL SPECIFICATIONS

Temperature range	-55 / +165 $^{\circ}\text{C}$
IP rating	-



DRAWING

Unit: mm

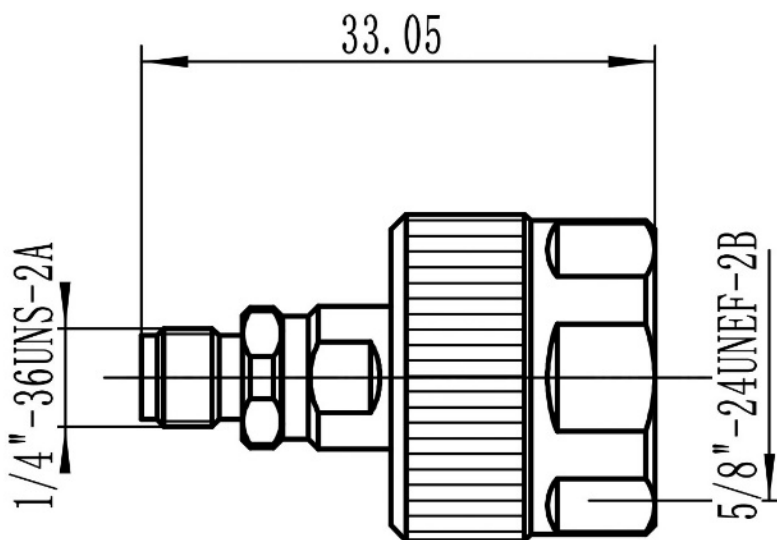

TEST DATA

