

DATASHEET

PRODUCT SPECIFICATIONS

Interface	2.4mm
Standard	IEC 61169-40
Gender 1	Male
Gender 2	Male
Geometry	Straight
Panel mounting feature	-



ELECTRICAL SPECIFICATIONS

Impedance	50 Ω
Frequency range	dc – 50 GHz
VSWR	≤ 1.15
Working voltage	150 V _{RMS}
Dielectric withstanding voltage	500 V _{RMS}
Insulation resistance	≥ 5000 M Ω

MECHANICAL SPECIFICATIONS

Durability	≥ 1000 mating
Weight	11.2 g

MATERIAL SPECIFICATIONS

COMPONENT	MATERIAL	PLATING
Body, Nut	Stainless steel	Passivated
Center contact	BeCu (Beryllium-Copper)	Gold
Insulator	PEI (Polyetherimide)	-


ENVIRONMENTAL SPECIFICATIONS

Temperature range	-55 / +165 °C
IP rating	-



DRAWING

Unit: mm

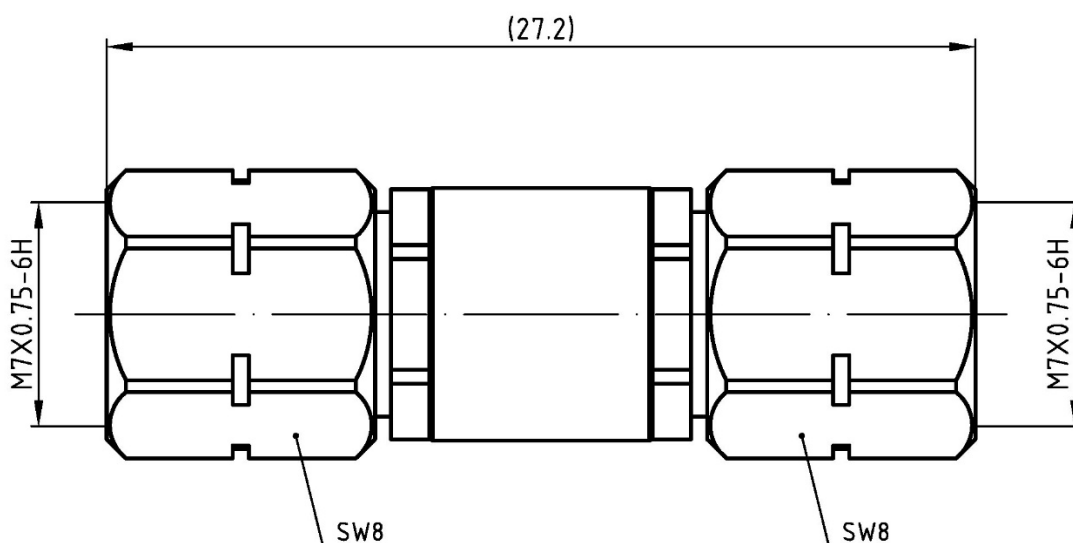

TEST DATA

Unit: mm

