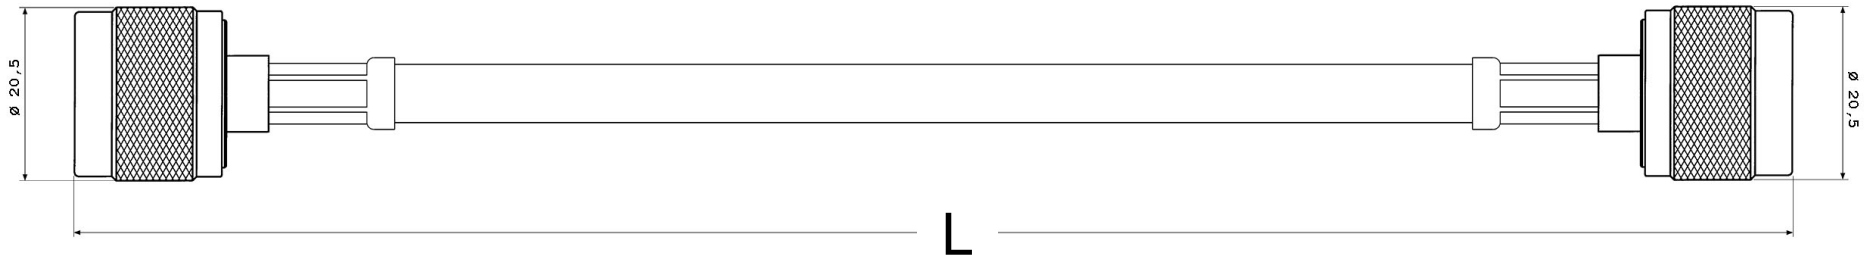

MECHANICAL SPECIFICATIONS					
	Type	**Geometry**		**Material & finishing**	
Connector 1	N Plug	Straight		Brass / SUCOPLATE®	
Connector 2	N Plug	Straight		Brass / SUCOPLATE®	
	Type	**Dielectric**	**Jacket**	**Ext. diam.**	**Op. Temp.**
Cable	S_04272_B	Foam-PE	PE	5.5 mm	-40/+85 °C

ELECTRICAL SPECIFICATIONS	
Frequency range	DC – 18 GHz VSWR ≤1.33 (RL ≥17 dB)
Impedance	50 Ω

Frequency (GHz)	**Typical Attenuation** (dB/m)	**Frequency** (GHz)	**Typical Attenuation** (dB/m)
0.9	0.23	10.8	1.13
2.7	0.45	12.6	1.27
5.4	0.70	14.4	1.40
8.1	0.93	18.0	1.65

RoHS COMPLIANT

Part #	**Standard length**
N02N02-60-00500	L = 50 cm
N02N02-60-00600	L = 60 cm
N02N02-60-00750	L = 75 cm
N02N02-60-01000	L = 1 m
N02N02-60-01500	L = 1.5 m
N02N02-60-02000	L = 2 m
N02N02-60-05000	L = 5 m
N02N02-60-10000	L = 10 m
Part #	**Custom length**
N02N02-60-“L”	Replace **L** with cable length in **mm**

QAXIAL
QUALITY COAXIAL

www.qaxial.com

N02N02-60 Series