

DC to 67 GHz, 0.5 W, 1.85mm Termination

DLVM-50R5-67

ELECTRICAL SPECIFICATIONS:

Frequency range	DC – 67 GHz
Impedance	50 Ω
VSWR	≤1.20
Input AVG power	0.5 W @ 25 °C ambient

MECHANICAL SPECIFICATIONS

Interface	1.85mm
Gender	Male
Standard	IEC 60169-32
Weight	~6 g

MATERIAL SPECIFICATIONS

COMPONENT	MATERIAL	FINISHING
Connectors	Stainless steel	Passivated
Center contact	BeCu	Gold
Insulator	PEI	-

ENVIRONMENTAL SPECIFICATIONS

Op. temperature	-55 / +125 °C
Storage temperature	-55 / +125 °C
RoHS	Compliant (2011/65/EU RoHS 3)
REACH	Compliant (EC 1907/2006)




KEY FEATURES

- DC to 67 GHz Wideband Operation
- Excellent Impedance Matching
- Stable RF Performance Across Full Band
- 1-year standard warranty



DRAWING unit: mm

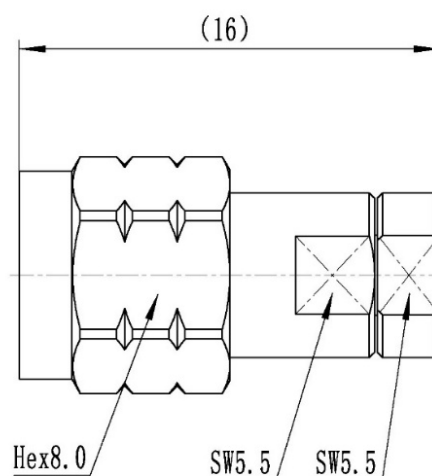

DC to 67 GHz, 0.5 W, 1.85mm Termination

DLVM-50R5-67

TYPICAL PERFORMANCES (VSWR)

