


0.5 – 6 GHz, 30 W, 8-Way SMA Power Divider

PWS-8S11-OR506-30

MECHANICAL SPECIFICATIONS		
Input/output interface	SMA	
Gender	Female	
Standard	MIL-STD-348A	
Number of output ports	8	
Weight	~334 g	
ELECTRICAL SPECIFICATIONS		
Impedance	50 Ω	
Frequency range	0.5 – 6 GHz	
Input VSWR	≤1.40	
Output VSWR	≤1.30	
Insertion loss	≤2.8 dB (excluding theoretical loss 9 dB)	
Isolation	>18 dB	
Amplitude balance	≤ ±0.4 dB	
Phase balance	≤ ±5°	
Input power (CW)	30 W (as divider) / 2 W (as combiner)	
MATERIAL SPECIFICATIONS		
COMPONENT	MATERIAL	FINISHING
Housing	Aluminium	Conductive oxidation
Connector body	Stainless steel	Passivated
Connector center pin	BeCu	Gold
ENVIRONMENTAL SPECIFICATIONS		
Temperature range	-35 / +75 °C	
RoHS	Compliant (2011/65/EU RoHS 3)	
REACH	Compliant (EC 1907/2006)	



- KEY FEATURES**
- Wideband RF operation
 - Excellent port-to-port balance and isolation
 - Robust, industrial-grade design
 - 1-year standard warranty

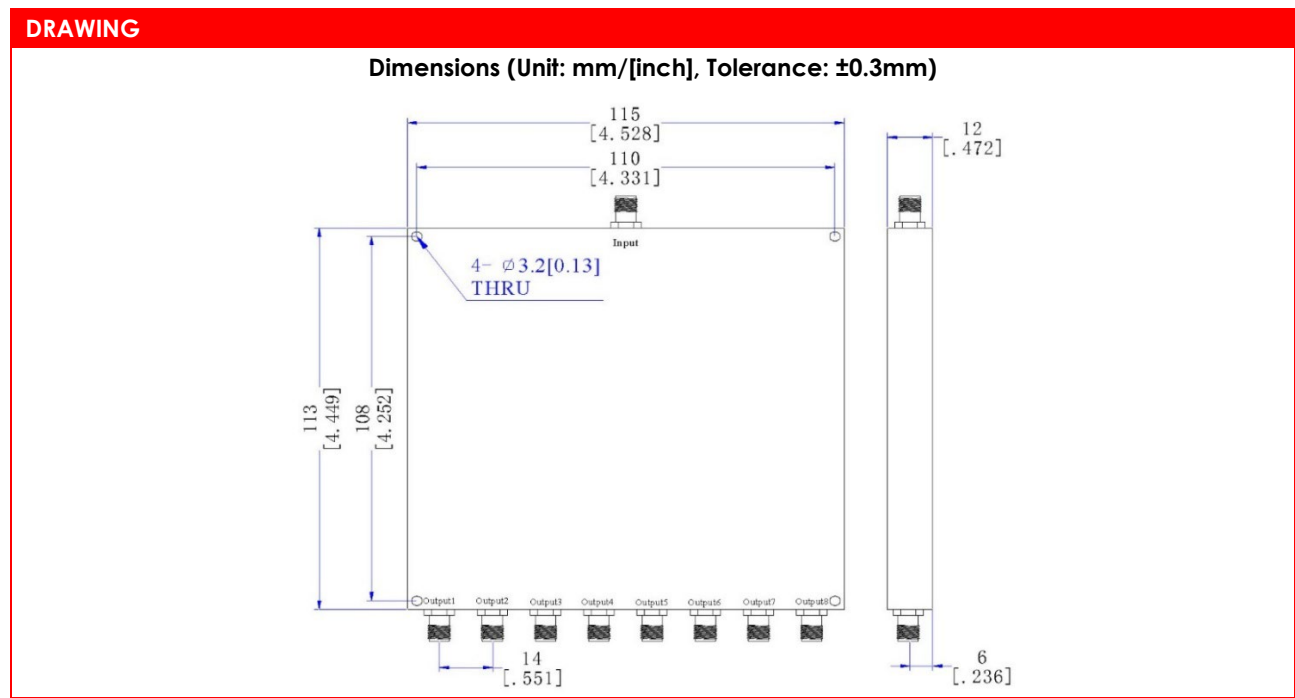

0.5 – 6 GHz, 30 W, 8-Way SMA Power Divider

PWS-8S11-OR506-30

