


1		2		3		4		5		6		7		8	
REVISIONS															
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE													

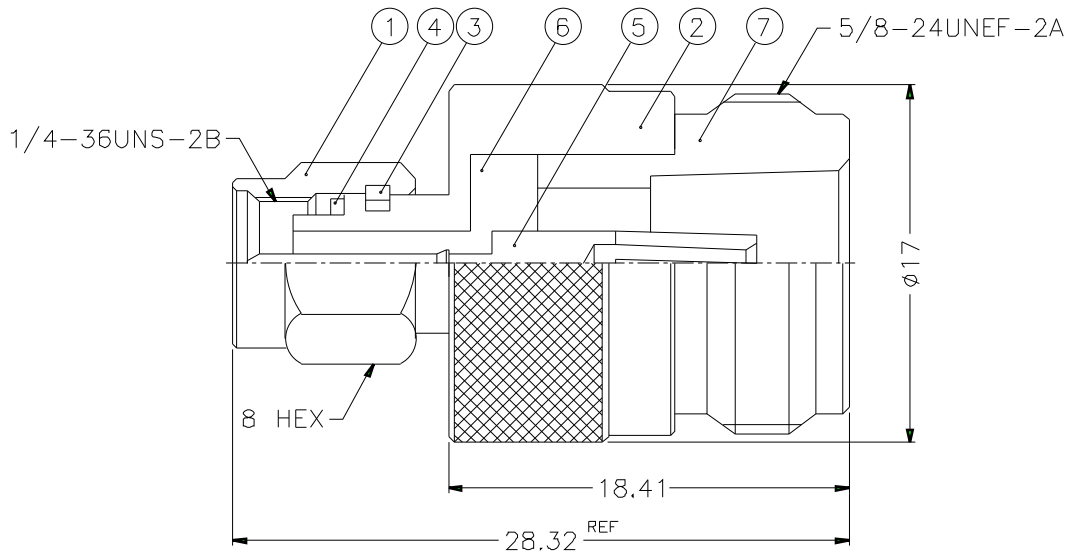

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
 1. BRASS PER QQ-B-626
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 3. PHOSPHOR BRONZE PER QQ-B-750
 4. BERYLLIUM COPPER PER QQ-C-530
 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 6. TEFLON MIL-P-19468

7 BODY					NOTE 1	NOTE 2	1	N7900-4	DIMENSIONS ARE IN MILLIMETERS				PART NO. NF-SMAM-NT3G-50		<h1>Amphenol</h1> TITLE SMA MALE TO N FEMALE ADAPTOR DRAWING NO. KJ-NF-SMAM-NT3G-50 ITEM NO.		
6 INSULATOR					NOTE 6	NATURAL	1	RSA-3452-6	UNLESS OTHERWISE SPECIFIED TOLERANCES				APPROVED				DATE
5 CONTACT PIN					NOTE 3	NOTE 5	1	RSA-3452-5-B	0.5-6 = ±0.2				CHECKED				DATE
4 GASKET					SILICONE	RED	1	GS-6/43X06	6-30 = ±0.4				DRAWN				DATE
3 RETAINER RING					NOTE 4	NATURAL	1	SMA5000-4-B	30-120 = ±0.6								
2 HOUSING					NOTE 1	NOTE 2	1	RSA-3452-2	120-315 = ±1								
1 SHELL					NOTE 1	NOTE 2	1	SMA5000-1-C	315-1000 = ±1.6								
NO. DESCRIPTION					MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A	FILE NO.				

1		2		3		4		5		6		7		8	
---	--	---	--	---	--	---	--	---	--	---	--	---	--	---	--